



# MEMORY

CM16989

SET L OVAL - PC1340



### COMPONENTS INCLUDED WITH UNIT:

1× ceiling canopy with terminal connectors  
5× metal fixtures  
5× glass shades  
5× string pulls  
15× screws for securing fixtures to ceiling canopy  
1× installation manual

### WARNING:

**Installation must be carried out by  
a qualified electrician only.**

**Switch off power at main circuit panel prior to  
installation!**

**The manufacturer assumes no liability for  
damage occurring during transport or  
resulting from incorrect installation.**

**Installation time: 1 hour / 3 persons**





### CLEANING THE GLASS

**BROKIS upholds only the highest possible quality standards. Prior to shipping, the light undergoes several quality controls and stages of cleaning. Because transportation, storage, and the amount of time that passes between packing at our plant and subsequent unpacking by the client can affect the light in different ways, we strongly recommend cleaning it prior to assembly.**

**The glass must first be rinsed in warm water, and a dish detergent may be used to remove all foreign particles, dust, and grease. Repeat the process if necessary and then dry the glass thoroughly with a paper towel.**

**Recommendation: Do not use mineral spirits, highly concentrated thinners, or other substances not intended for use on glass surfaces. Do not use any cleaning agents containing silicone, as they may leave a film and attract dust and smudges.**


**PRIOR TO SHIPPING, THE FUNCTIONALITY OF EACH LIGHT AND ITS COMPONENTS IS THOROUGHLY TESTED. THE MANUFACTURER ASSUMES NO LIABILITY FOR THE MISHANDLING OF PRODUCTS.**



## 1. MARKING DRILL POINTS FOR CEILING CANOPY


With regard to various types of ceilings, we recommend consulting installation with an expert. The manufacturer assumes no liability for incorrect installation, the use of improper anchors, or defects in the material to which the ceiling canopy is secured. Use anchors of sufficient strength (not included). When unpacking the light, do so with consideration for its material composition.

Position the ceiling canopy on the ceiling, mark the anchor holes, and then set the ceiling canopy aside. Next, drill the holes in the ceiling and insert anchor plugs of sufficient strength.

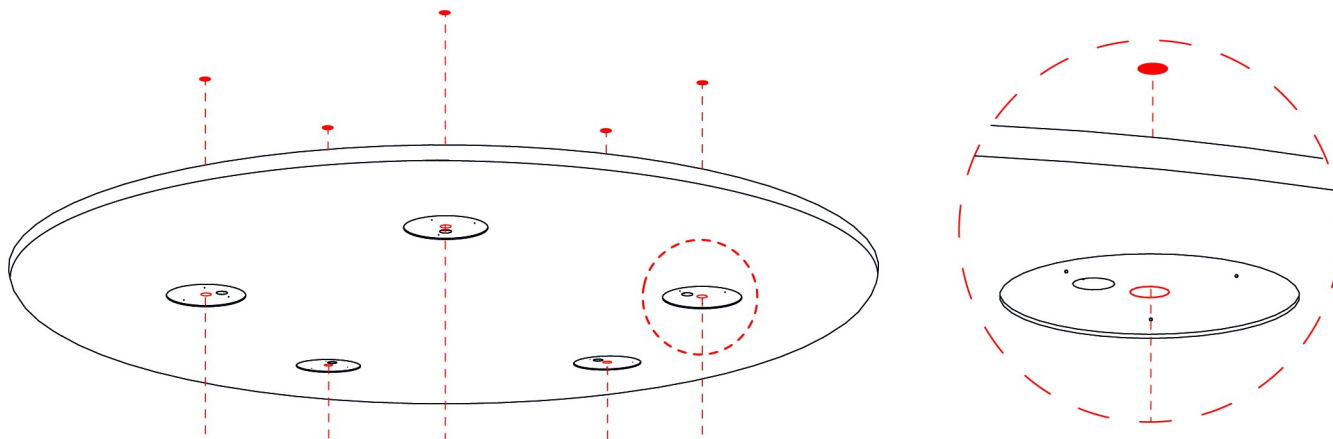



## 2. CONNECTING THE LIGHT TO THE BUILDING WIRING

Hold the ceiling canopy against the ceiling so the holes align with the anchor holes in the ceiling. Connect the ceiling canopy to the building wiring, including the ground wire, as shown in the connection diagram.

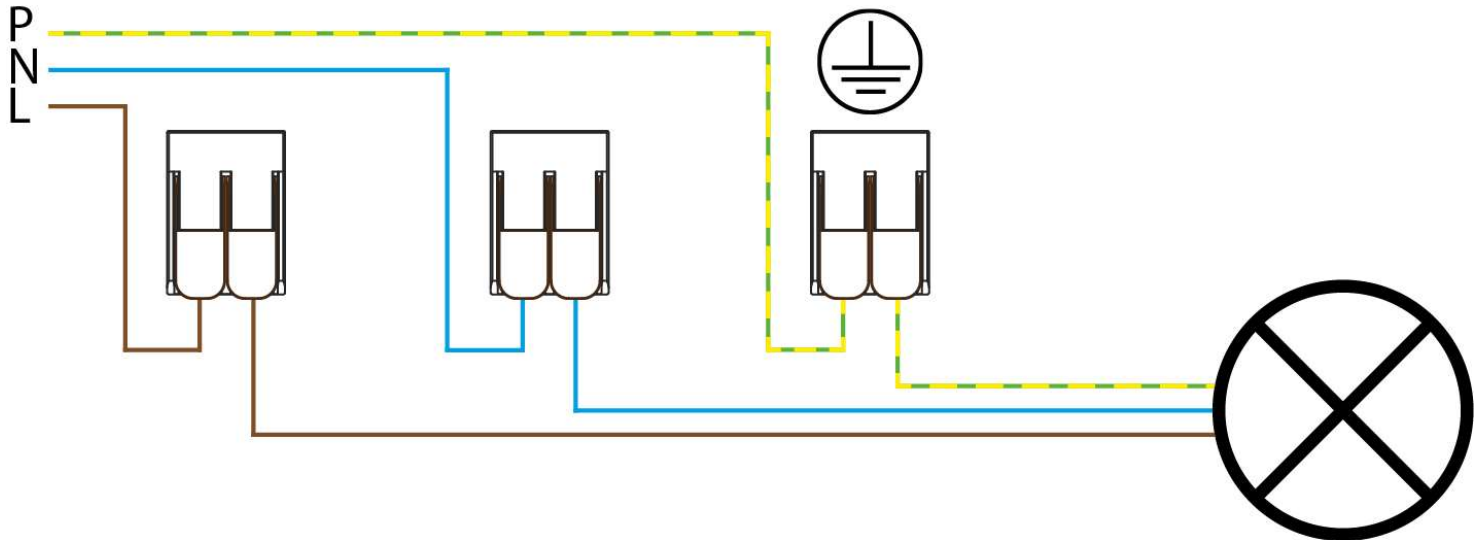


### 3. INSTALLING THE CEILING CANOPY

Secure the ceiling canopy to the ceiling using screws (not included).

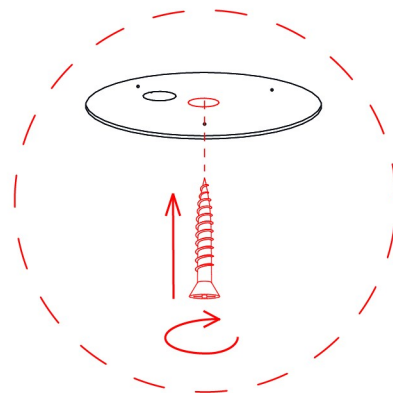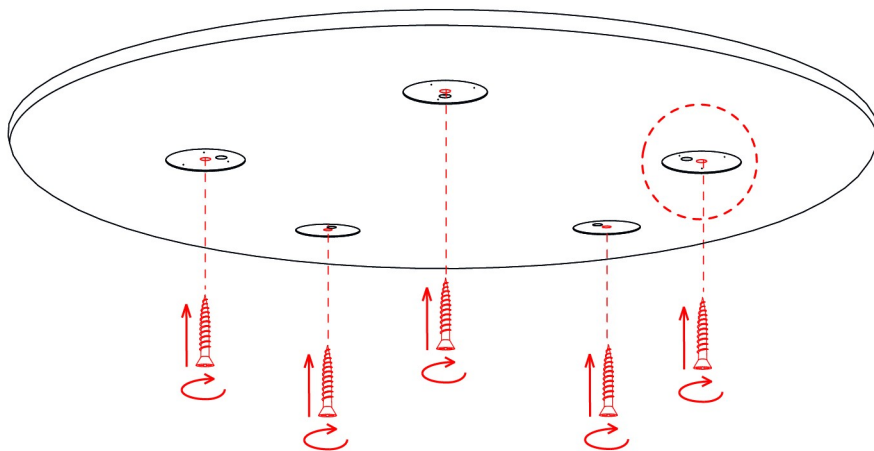


#### 4. MOUNTING THE METAL LIGHT FIXTURES ON THE CEILING CANOPY

Using the screws included with the light, secure the metal light fixtures to the cutouts in the bottom of the ceiling canopy.

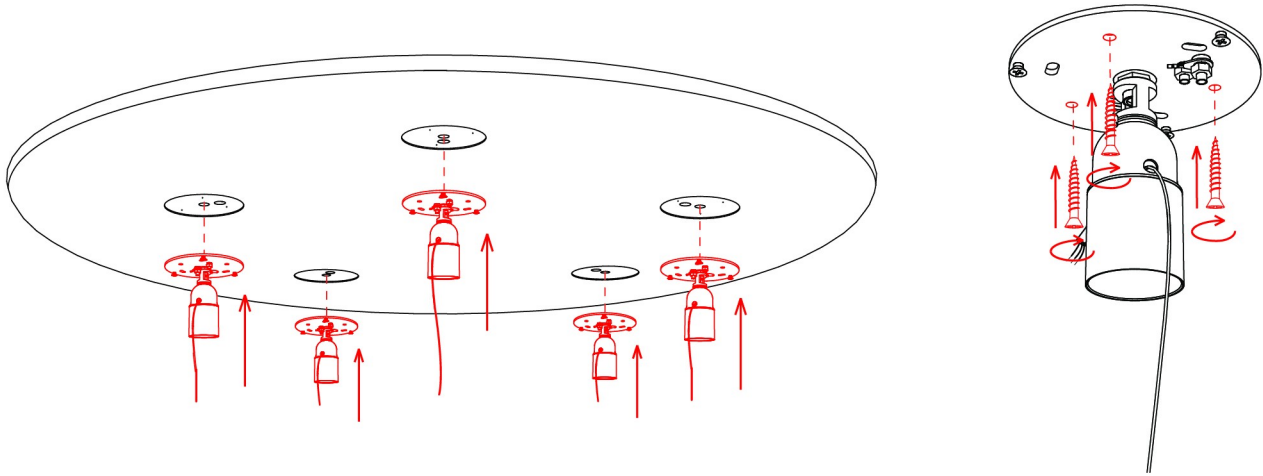

## 5. ELECTRICAL CONNECTION


Wire the light fixtures according to the connection diagram.

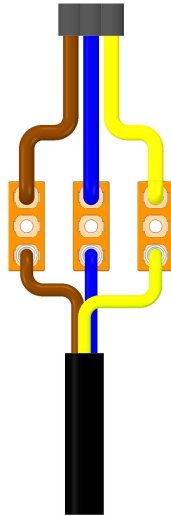



## 6. INSTALLING THE LIGHT SOURCE

Install the light source (not included).

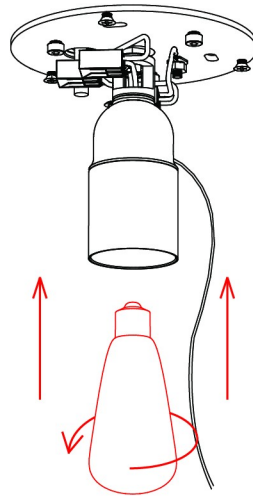


## 7. ATTACHING THE SHADES

Pass the string hanging from the metal light fixture through first the large opening and then the small opening in the glass shade.


Connect the ground wire with FASTON terminal to the shade mounting ring.

Position the glass shade on the metal light fixture so that the screws pass through the openings in the shade mounting ring. Gently rotate the glass shade clockwise until it is secured firmly to the metal light fixture. If rotation is not smooth, do not use force. Reposition the glass shade and start again.

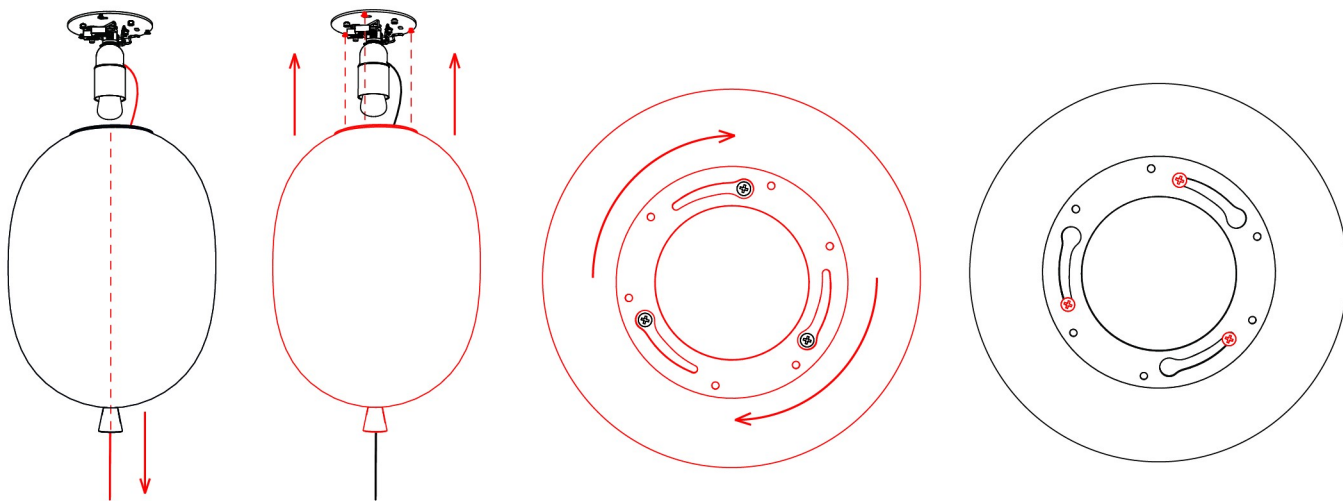

## 8. INSTALLING THE METAL STRING PULL

Pass the string through the metal string pull and secure with a knot.

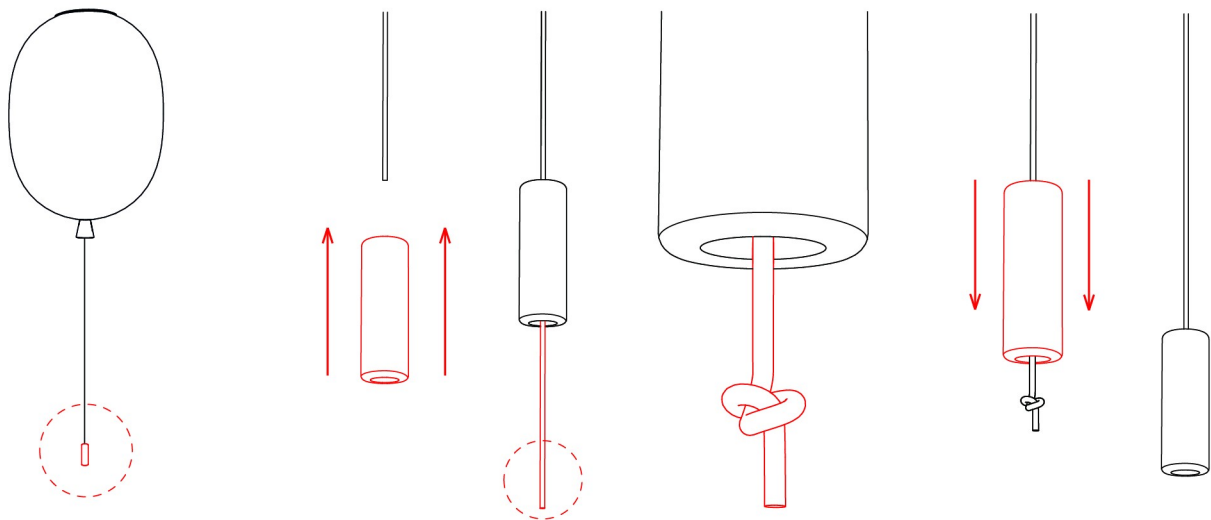

## 9. SWITCHING ON THE LIGHT

Restore power at the main circuit panel and verify that the light works properly.

