



BROKIS®



CM16088

OVERLAY

TABLE S, M - PC1299, PC1305



Download

COMPONENTS INCLUDED WITH UNIT:

1× light
1× light source
2× hand screw M4×16
1× pair cotton gloves
1× installation manual

WARNING:

The manufacturer assumes no liability for damage resulting from incorrect assembly.

When unpacking the light, do so with regard for its material composition – the main components are made of glass and very fragile material.

Wear the cotton gloves included with the light when unpacking and assembling it.

Installation time: 10 minutes / 1 person



BROKIS®

BROKIS S.R.O.
ŠPANIELOVA 1315/25
163 00 PRAHA 6 - ŘEPY
CZECH REPUBLIC

ORG. ID 64940799
VAT ID CZ64940799
C 42174 MĚSTSKÝ SOUD
V PRAZE

TEL +420 567 211 517
TECHNICAL@BROKIS.CZ
INFO@BROKIS.CZ
WWW.BROKIS.CZ



CLEANING THE GLASS

BROKIS upholds only the highest possible quality standards. Prior to shipping, the light undergoes several quality controls and stages of cleaning. Because transportation, storage, and the amount of time that passes between packing at our plant and subsequent unpacking by the client can affect the light in different ways, we strongly recommend cleaning it prior to assembly.

The glass must first be rinsed in warm water, and a dish detergent may be used to remove all foreign particles, dust, and grease. Repeat the process if necessary and then dry the glass thoroughly with a paper towel.


Recommendation: Do not use mineral spirits, highly concentrated thinners, or other substances not intended for use on glass surfaces. Do not use any cleaning agents containing silicone, as they may leave a film and attract dust and smudges.

PRIOR TO SHIPPING, THE FUNCTIONALITY OF EACH LIGHT AND ITS COMPONENTS IS CHECKED THOROUGHLY. THE MANUFACTURER ASSUMES NO LIABILITY FOR THE MISHANDLING OF PRODUCTS.





1. INSTALLING THE GLASS SHADE

Position the glass shade on the concrete base with the holes facing down and use the supplied M4×16 handscrews screws to secure it in place.

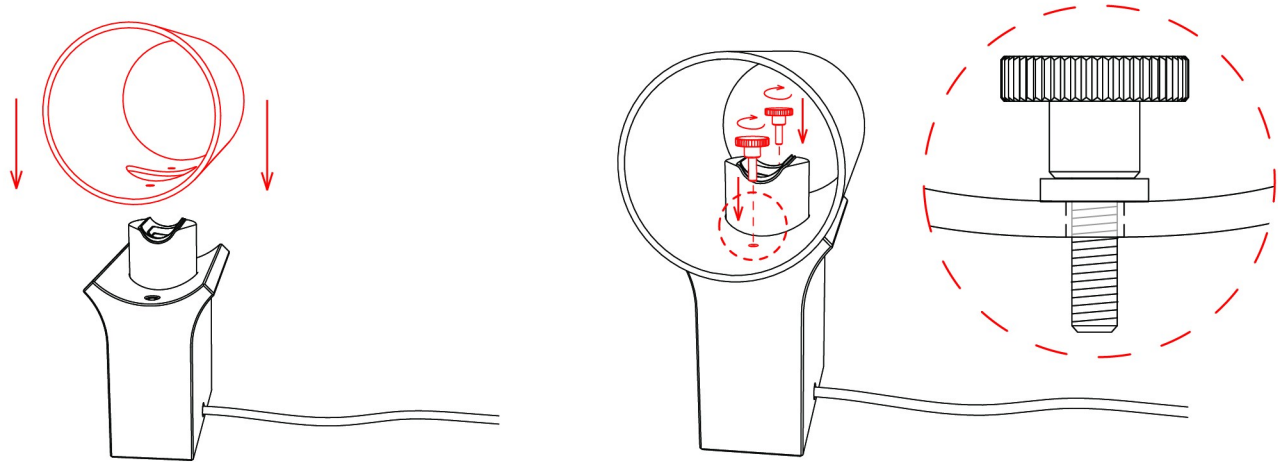


2. INSTALLING THE LIGHT SOURCE

Slide the light source into the glass shade and position it over the socket. Press gently and evenly on the light source to seat it in the socket.

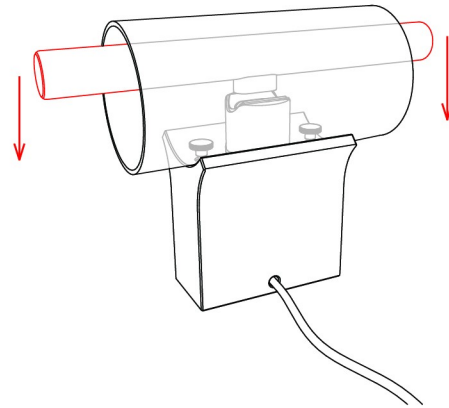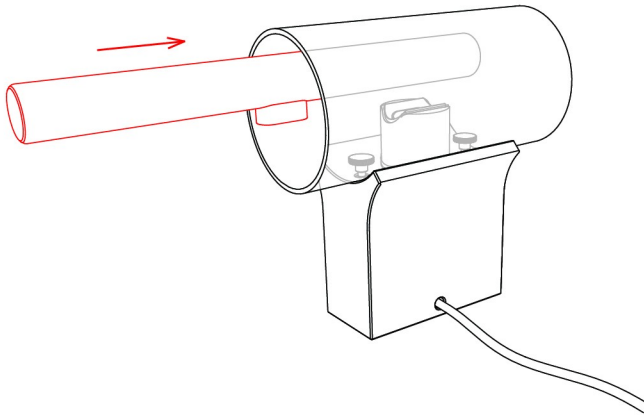

3. SWITCHING ON THE LIGHT

Plug the light into an electrical outlet and verify that it works properly.

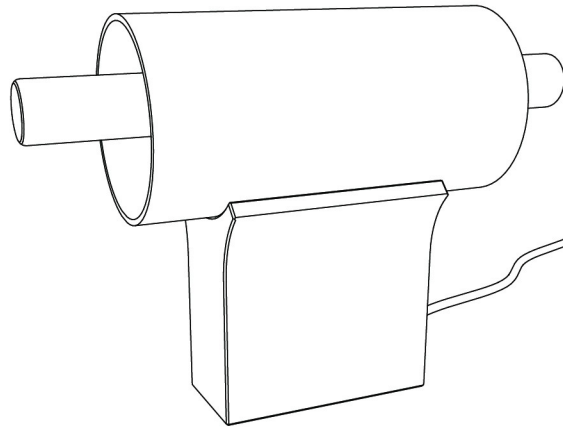

4. REMOVING THE LIGHT SOURCE

Gently lift one end of the light source and then the other to remove it from the socket and carefully slide it out of the glass shade.

