



# PURO FLOOR

CM13615

LARGE - PC1253



Download

### COMPONENTS OF PACKAGING:

1x metal base with power cable  
6x Wago 2-conductor connectors  
1x LED light source 600 mm  
1x LED light source 800 mm  
1x LED light source 1000 mm  
1x glass shade 600 mm  
1x glass shade 800 mm  
1x glass shade 1000 mm  
3x metal top caps  
1x pair cotton gloves  
1x installation manual

### WARNING:

**The manufacturer assumes no liability for damage resulting from incorrect assembly. When unpacking the light, do so with regard for its material composition – the main components are made of glass.**

**Wear the cotton gloves included with the light when unpacking and assembling it.**

**Instalation time: 30 minutes / 1 person**



BROKIS®

BROKIS S.R.O.  
ŠPANELOVA 1315/25  
163 00 PRAHA 6 - ŘEPY  
CZECH REPUBLIC

ORG. ID 64940799  
VAT ID CZ64940799  
C 42174 MĚSTSKÝ SOUD  
V PRAZE

TEL +420 567 211 517  
TECHNICAL@BROKIS.CZ  
INFO@BROKIS.CZ  
WWW.BROKIS.CZ



### CLEANING THE GLASS:

**BROKIS upholds only the highest possible quality standards. Prior to shipping, the light undergoes several quality controls and stages of cleaning. Because transportation, storage, and the amount of time that passes between packing at our plant and subsequent unpacking by the client can affect the light in different ways, we strongly recommend cleaning it prior to assembly.**

**The glass must first be rinsed in warm water, and a dish detergent may be used to remove all foreign particles, dust, and grease. Repeat the process if necessary and then dry the glass thoroughly with a paper towel.**



**Recommendation: Do not use mineral spirits, highly concentrated thinners, or other substances not intended for use on glass surfaces. Do not use any cleaning agents containing silicone, as they may leave a film and attract dust and smudges.**

**PRIOR TO SHIPPING, THE FUNCTIONALITY OF THE LIGHT AND ITS COMPONENTS ARE CHECKED THOROUGHLY. THE MANUFACTURER ASSUMES NO LIABILITY FOR THE MISHANDLING OF PRODUCTS.**




## 1. INSTALLING THE LIGHT SOURCES

Screw the LED light sources into the sockets extending from the base of the light according to size. The size of the light source for a given socket is marked inside. The sizes are 600 mm, 800 mm, and 1000 mm.

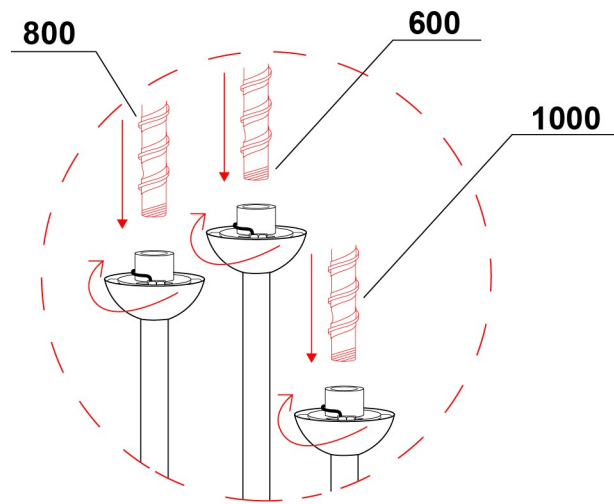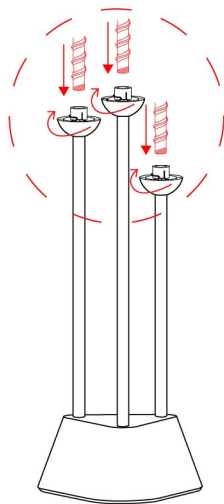



## 2. CONNECTING THE WIRING

Connect the wiring according to the diagram. Next, insert the connectors into the grooves in the socket housing.

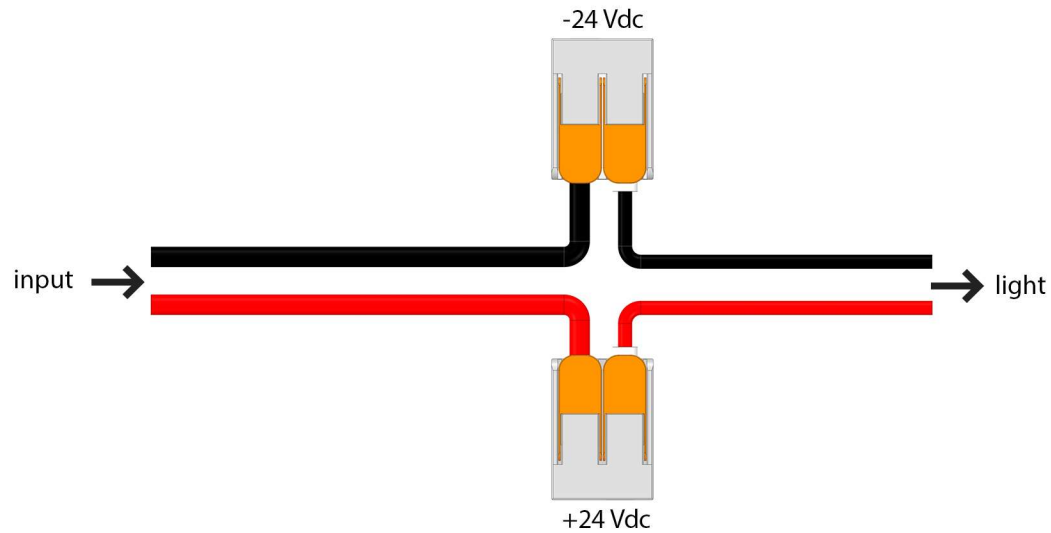

### 3. INSTALLING THE GLASS SHADES

Lower the glass shade over the LED light source. Position it on the foam seal in the socket housing and then screw on the top cap. Carefully tighten the top cap until the foam seal is slightly compressed by the glass shade.

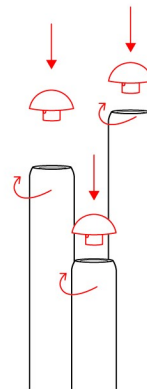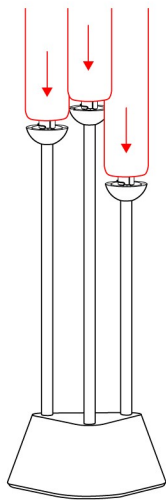

#### 4. SWITCHING ON THE LIGHT

Switch on the light and verify that it works properly.

