



BROKIS®

SHADOWS

CM12282

PC897



Download

COMPONENTS INCLUDED WITH UNIT:

- 1x glass shade
- 1x assembled wooden fixture with light source
- 1x wooden ceiling canopy with bracket
- 1x plastic cable stop
- 2x hex screws (M4x12)
- 1x hex key (size 2)
- 1x hex key (size 1.5)
- 3x terminal connectors
- 2x silicone pads
- 1x cotton gloves
- 1x installation manual

WARNING:

Installation must be carried out by a qualified electrician only.

Switch off power at main circuit panel prior to installation!

The manufacturer assumes no liability for damage occurring in transport or resulting from incorrect installation.

Installation time: 20 minutes /1 person



BROKIS®

BROKIS S.R.O.
ŠPANELOVA 1315/25
163 00 PRAHA 6 - ŘEPY
CZECH REPUBLIC

ORG. ID 64940799
VAT ID CZ64940799
C 42174 MĚSTSKÝ SOUD
V PRAZE

TEL +420 567 211 517
TECHNICAL@BROKIS.CZ
INFO@BROKIS.CZ
WWW.BROKIS.CZ



CLEANING THE GLASS

BROKIS applies the highest possible quality standards in manufacturing its lights. Prior to shipping, each light undergoes several quality controls and stages of cleaning. Lights may require additional cleaning as a result of transportation, storage, and the amount of time that passes between packing in our plant and subsequent unpacking by the client. Therefore, we emphasize cleaning the lights prior to installation.

The glass must first be rinsed in hot water, with a dilution of a dish-detergent used to remove all foreign particles and dust. Eventually repeat this basic treatment, if necessary. Afterwards the glass must have a second cleaning using hot water, with a dilution of a de-greaser (such as ammonia or vinegar). The glass must then be thoroughly rinsed with running hot water. Eventually repeat this treatment, if necessary. The glass is then thoroughly dried with a paper towel or a clean soft cotton towel. Only re-assemble the glass to the lamp body, when completely cooled down.


Do not use mineral spirits, highly concentrated thinners, or other substances not intended for use on glass surfaces. Also: do not use products, containing silicones – since they will rapidly attract more dust and grease.

PRIOR TO SHIPPING, THE FUNCTIONALITY OF EACH LIGHT AND ITS COMPONENTS IS THOROUGHLY TESTED. THE MANUFACTURER ASSUMES NO LIABILITY FOR THE MISHANDLING OF PRODUCTS.




1. INSTALLING THE CEILING BRACKET

Choose anchors of sufficient strength (not included) and secure the bracket to the ceiling. With regard to various types of ceilings, we recommend consulting installation with an expert. The manufacturer assumes no liability for incorrect installation, incorrect anchors, or defects in the material to which the bracket is secured.




2. INSTALLING THE POWER CABLE

Pass the power cable through the wooden canopy and secure it with a plastic cable stop.

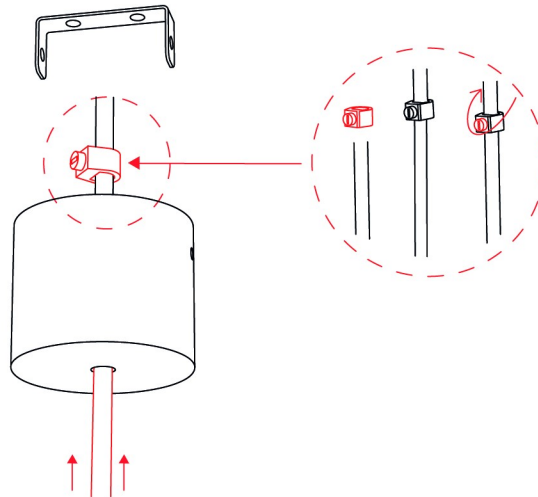



3. CONNECTING THE LIGHT TO THE BUILDING WIRING

Connect the light to the building wiring according to the connection diagram.

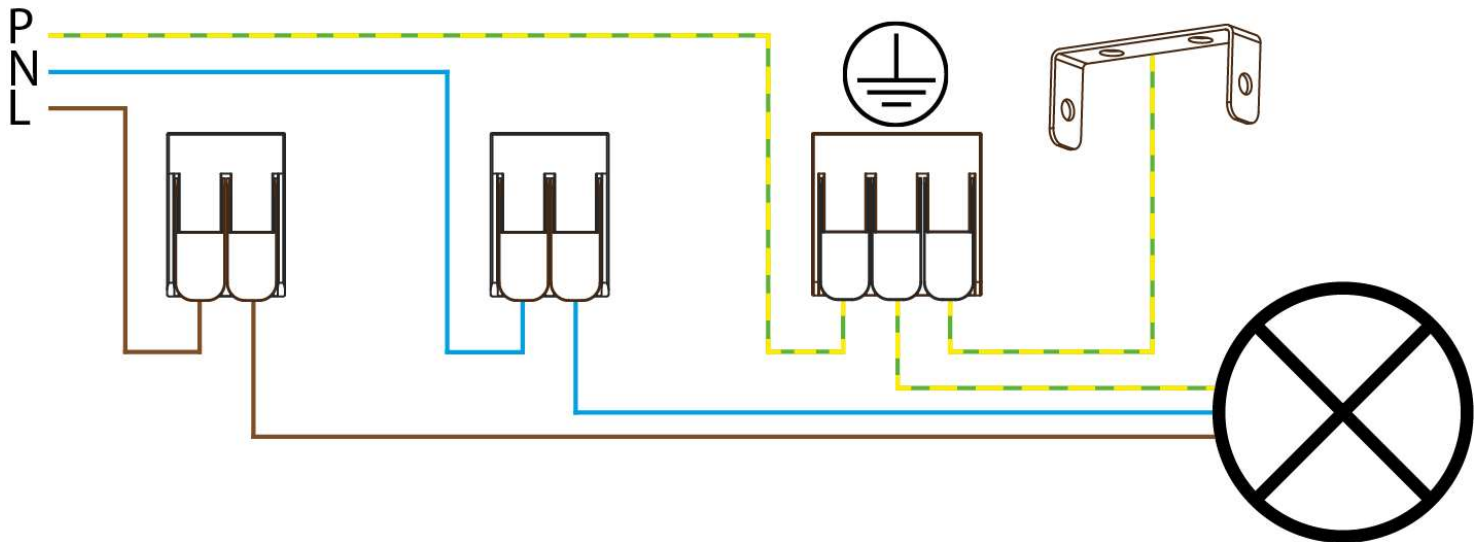

4. INSTALLING THE CEILING CANOPY


Attach the roof canopy to the bracket using two set screws and a size 2 hex key.

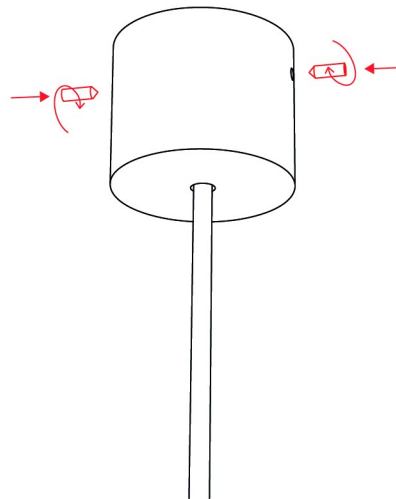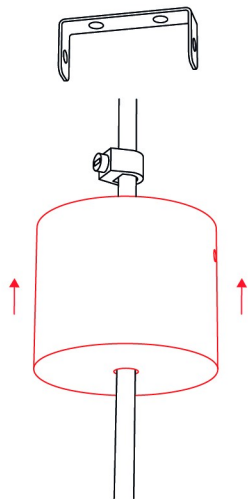

5. INSTALLATION OF SHADE AND WOODEN MOUNTING

Gently lower the glass shade onto the wooden fixture. If the shade is slightly off balance, carefully turn it on the wooden fixture, or attach one of the silicone pads to the fixture beneath the glass.

Connect the power cable to the metal fixture. Each half of the connector (male/female) has a positioning mark to ensure a proper connection. An incorrect connection may result in the light not working. Screw on the metal connector cover and secure the set screw with the 1.5 size of hex key.

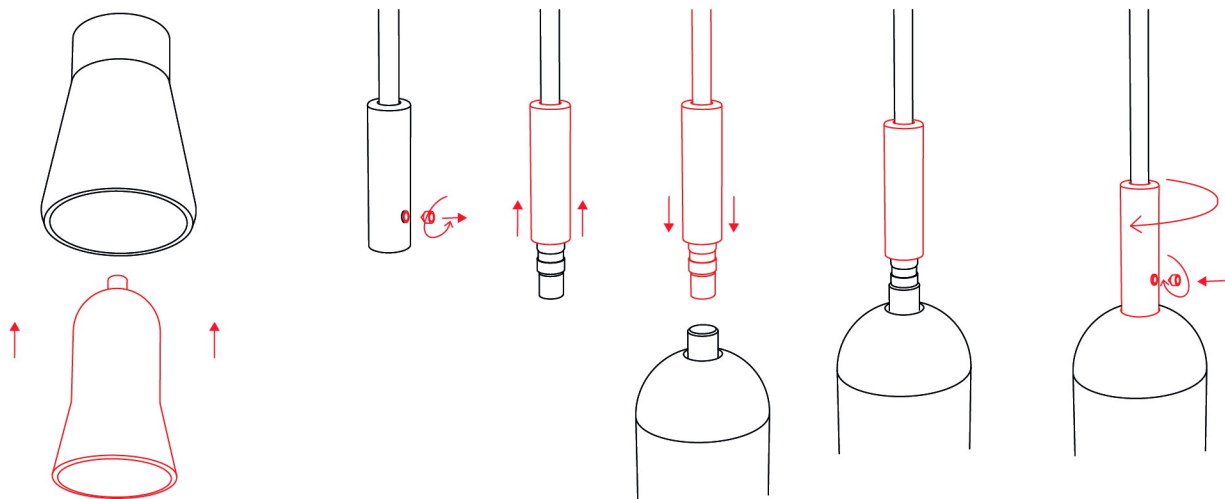

6. SWITCHING ON THE LIGHT

Restore power at the main circuit panel and verify that the light works properly.

