








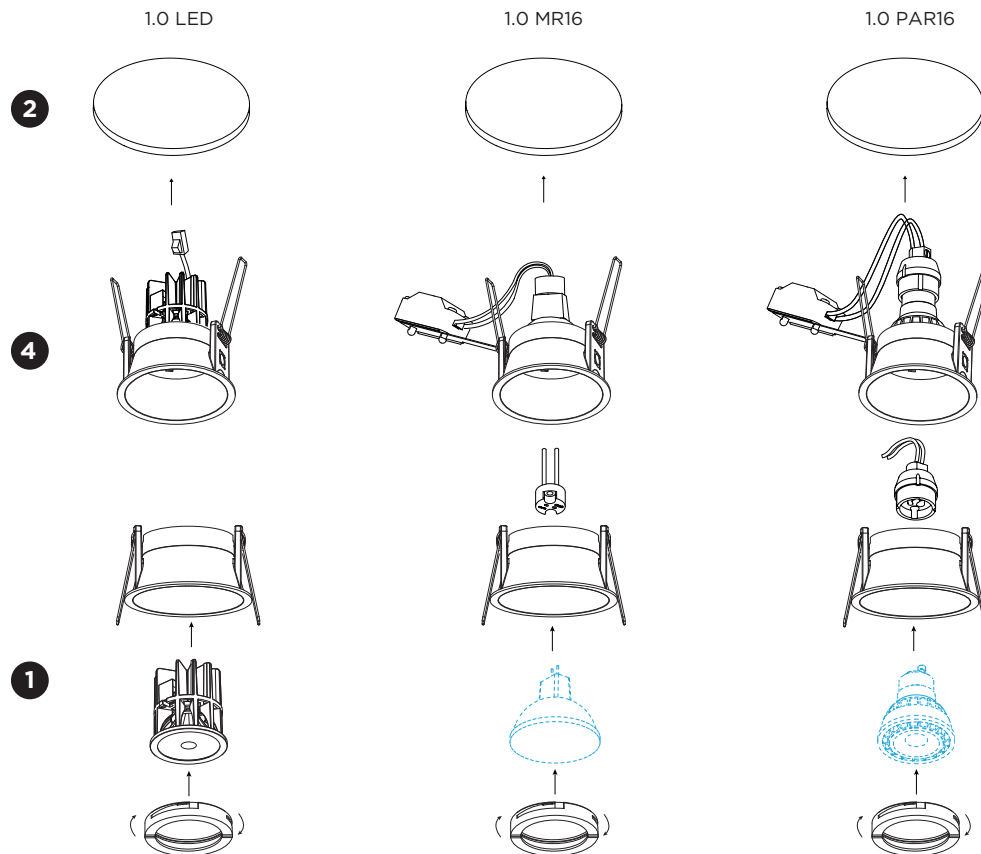





DEEPER FIX IP20

INSTALLATION INSTRUCTIONS | FEBRUARY 2022



DIMENSIONS

1.0 LED				
	30 ø84 95	76-79	4-38	95
1.0 MR16				
	30 ø84 96	76-79	4-38	100
1.0 PAR16				
	30 ø84 112	76-79	4-38	115


MOUNTING INSTRUCTION

- Put the light source in the assembled cover by locking the lamp ring in the housing by turning it for a quarter.
- Make a hole in the ceiling according to the prescribed dimensions.

POWER CONNECTION

SERIAL CONNECTION - for LED

Always use POWER SUPPLY according to the specifications of the LED-module




PARALLEL CONNECTION - for PAR16



- Push the springs upwards and insert the fixture in the ceiling hole.

DEEPER FIX IP20


INSTALLATION INSTRUCTIONS | FEBRUARY 2022

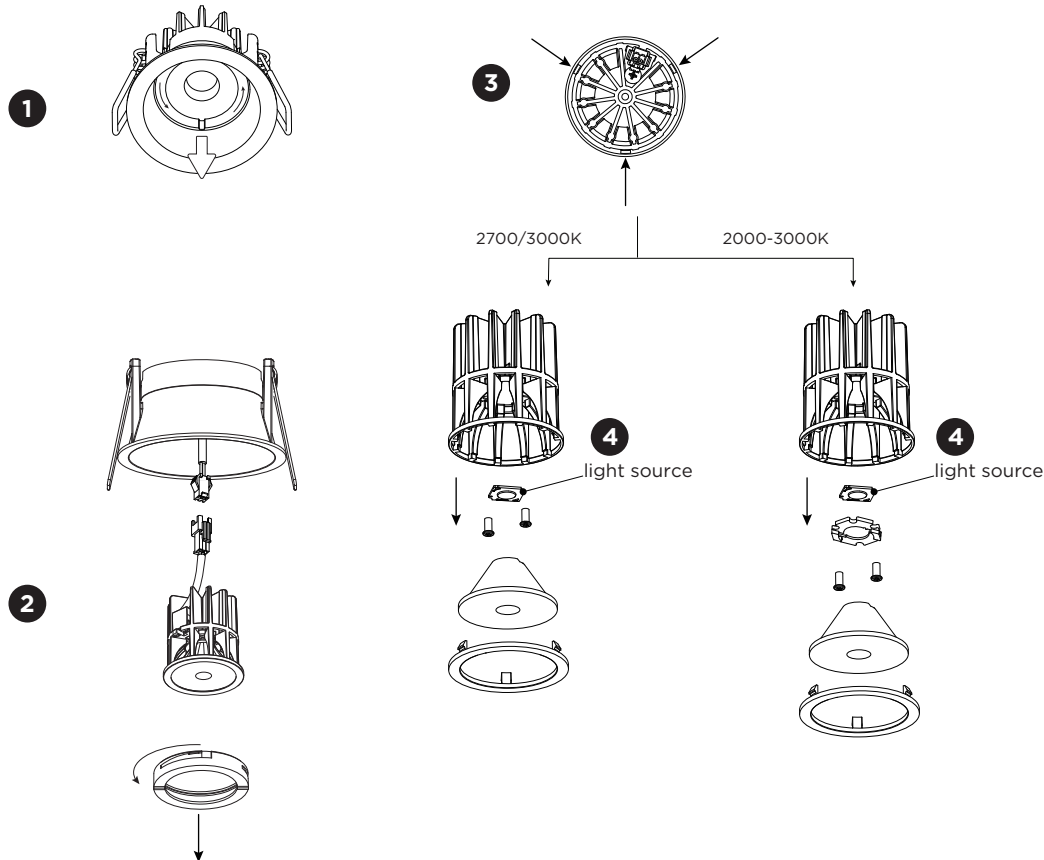

DISMOUNTING INSTRUCTION only for 1.0 LED

Light source

- 1 Hold and turn the front ring counterclockwise to remove the LED module.
- 2 Unplug the LED module to remove it from the luminaire.
- 3 Push at the three points to loosen the front ring.
- 4 Take out the lens and unscrew the light source to remove it.



To replace the light source please contact your Wever & Ducré customer service contact point.



This luminaire contains a light source with the energy class D.