HEXO SUSPENDED

13-Sep.-2018

2.0 | 3.0 LED

LED 8W | 220-240VAC | 50-60Hz | COB 3-step | incl. PS | phase-cut dim

CE ⏚ IP20 ↧0,3m ∧36° ▪

2.0
200mm

	gold	207364G_
	bronze	207364Q_
	copper	207364P_
	black texture	207364B_

3.0
300mm

	gold	207464G_
	bronze	207464Q_
	copper	207464P_
	black texture	207464B_

LIGHT COLOUR

2700K	>90CRI	420lm	3
3000K	>90CRI	440lm	5
1800-2850K	>95CRI	360lm	9

2.0 | 3.0 PAR16

◁ max. 35W | GU10 | 100-240VAC | 50-60Hz

CE ⏚ IP20 ↧0,9m ▪

2.0
200mm

	gold	207320G0
	bronze	207320Q0
	copper	207320P0
	black texture	207320B0

3.0
300mm

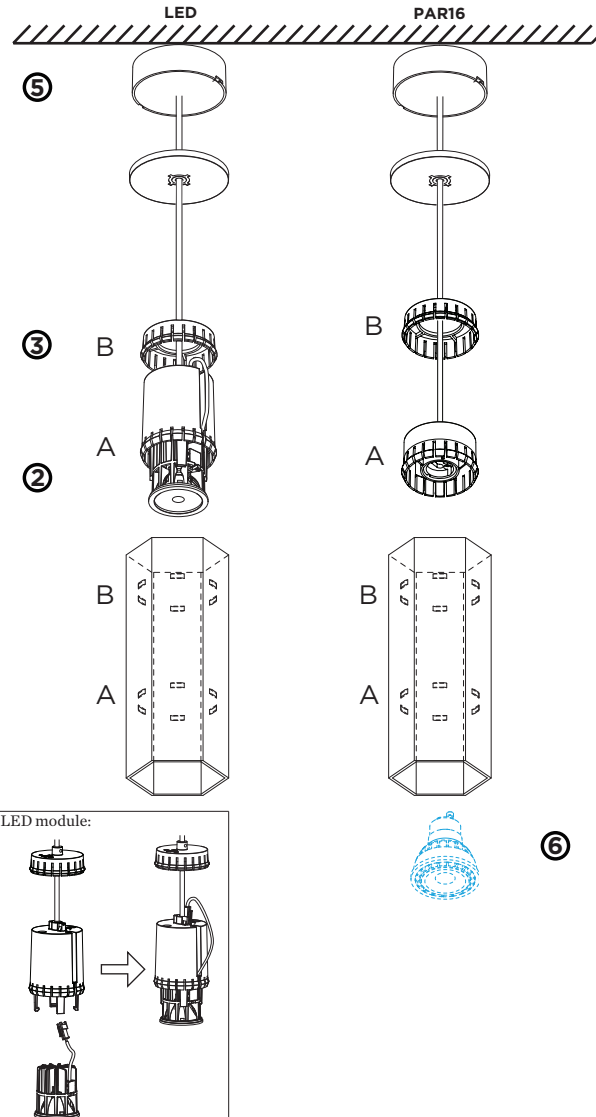|		
	gold	207420G0
	bronze	207420Q0
	copper	207420P0
	black texture	207420B0

OPTIONAL
for PAR16 lamps see our catalogue

* For this product, the cable with a plug that comes with the LED module is not needed. Please remove it first and then use the LED module.

not needed (this notification refers to the part of the cable)

mount LED module:

①

DIMENSIONS

ø84
29
max. 2500
200|300
77

MOUNTING INSTRUCTION

① ONLY FOR LED: mount the LED module into the suspension set.

② Insert part A until it clicks in the lower part of the cover

③ Insert part B until it clicks in the higher part of the cover

④ **POWER CONNECTION**

Connect wiring to the power supply (for LED)
or to terminal block (for PAR16)

PARALLEL CONNECTION

220-240V
N ⏚ L
fixture 01 fixture 02 fixture ..
L N   L N   L N

⑤ Mount the ceiling base on the celing

(You have to turn the cover counterclockwise a quarter in order to loosen it from the ceiling base and mounting back on is by turning clockwise.)

⑥ ONLY FOR PAR16
Insert the lamp

WEVER & DUCRÉ
LIGHTING

www.weverducre.com

Wever & Ducré bvba   Spinnerijstraat 99/21   8500 Kortrijk

INSTALLATION INSTRUCTIONS