

# SIRRO

03-Aug-2018

## 2.0 LED - ceiling surfaced

LED 2x10W | 220-240VAC | 50-60Hz | COB 3-step | incl. PS | phase-cut dim

CE IP20 0,3m 36° 35°/35° 355°

white texture	139264W_
white texture + black	139264E_
aluminium brushed + black	139264F_
black texture	139264B_

### LIGHT COLOUR

2700K   >90CRI   590lm	3
3000K   >90CRI   640lm	5
1800-2850K   >95CRI   440lm	9

## 2.0 PAR16 - ceiling surfaced

2xPAR16 max. 35W | GU10 | 100-240VAC | 50-60Hz

CE IP20 0,9m 35°/35° 355°

white texture	139220W0
white texture + black	139220E0
aluminium brushed + black	139220F0
black texture	139220B0

### OPTIONAL

for PAR16 lamps see our catalogue

## 2.0 LED - suspended

LED 2x10W | 220-240VAC | 50-60Hz | COB 3-step | incl. PS | phase-cut dim

CE IP20 0,3m 36° 35°/35° 355°

white texture	139664W_
white texture + black	139664E_
aluminium brushed + black	139664F_
black texture	139664B_

### LIGHT COLOUR

2700K   >90CRI   590lm	3
3000K   >90CRI   640lm	5
1800-2850K   >95CRI   440lm	9

## 2.0 PAR16 - suspended


2xPAR16 max. 35W | GU10 | 100-240VAC | 50-60Hz

CE IP20 0,9m 35°/35° 355°


white texture	139620W0
white texture + black	139620E0
aluminium brushed + black	139620F0
black texture	139620B0

### OPTIONAL

for PAR16 lamps see our catalogue

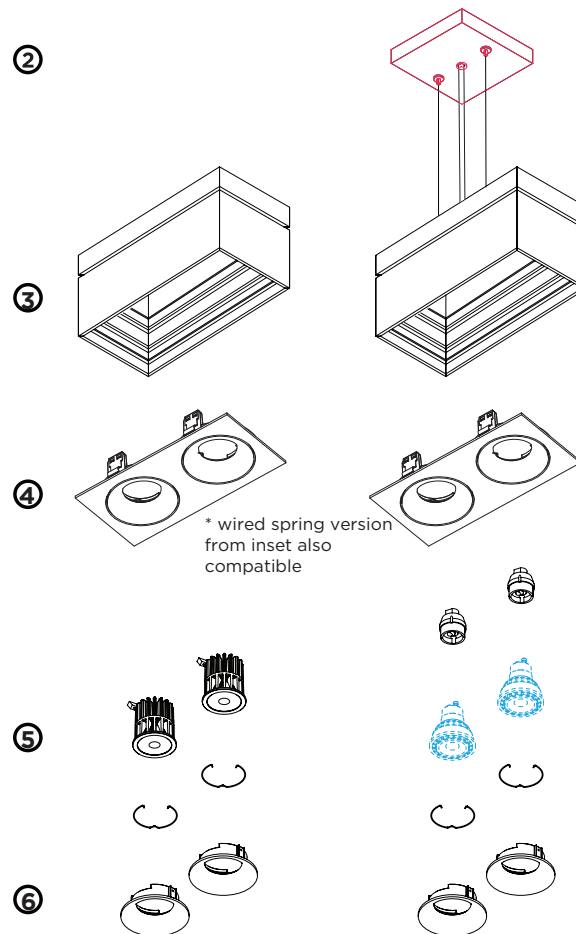


## DIMENSIONS



## MOUNTING INSTRUCTION

### POWER CONNECTION

- 1 PARALLEL CONNECTION - for LED and PAR16



- 2 Mount the ceiling base on the ceiling
- 3 Attach the SIRRO to the ceiling base (in case of surfaced version)
- 4 Insert the outer part of the inset module into the SIRRO
- 5 Insert the lamps into the inner parts of the inset module
- 6 Click the inner part of the inset module into the outer part

