

# FLOS

■ F6486030 Black

## String Light - Sphere head - 12mt cable

Designed by Michael Anastassiades, 2014




21W - 1515lm - 2700K

Suspension lamp providing diffused light. Black, white or blue varnished die-cast aluminium body coated with clear soft-touch varnish. Optical diffuser in opal PC. Suspension system of 12 metres with Kevlar reinforced coaxial cable. Available with wall/ceiling connection in black PC and power supply with floor switch in black varnished PC. The on/off switch is electronic with optical and touch dimm mechanism included or touch dimm and CASAMBI Ready version. Dimmer included. Compulsory to add either floor switch or ceiling/wall rose.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

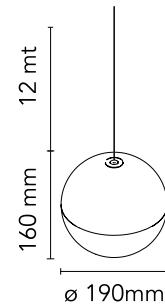

### Main specifications

EAN	8059607041390
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED array
Power (W)	21
System flux (lm)	1515

### Physical

Colour	Black
Length (mm)	190
Cord colour	Black
Cord length (mm)	12000
Net weight (kg)	1.12
Package height (mm)	300
Package width (mm)	300
Package length (mm)	300
Package volume (m3)	0.03
IP internal	20

### Download


Mounting instructions	<a href="#">↓ PDF</a>
Mounting instructions	<a href="#">↓ PDF</a>
Mounting instructions	<a href="#">↓ PDF</a>

### Photometric Files

LDT / IES	<a href="#">↓ LDT</a>
-----------	-----------------------


### Technical Drawings

<a href="#">Bim</a>	<a href="#">↓ ZIP</a>
---------------------	-----------------------

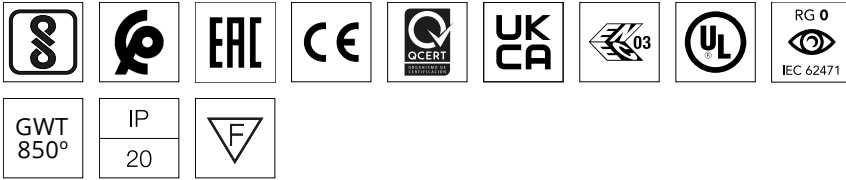


## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D



Replaceable (LED only) light source by a professional

## Schematic light drawing



Luminous flux luminaire  
1515 lm

## Photometric

Light distribution	Roto symmetric
CCT (K)	2700

## Electrical

Insulation class	III
Main voltage (Vac)	48
Forward voltage (V)	48
LED voltage Vf (Vdc)	null
Power Supply	Remote excluded
Dimmable	Yes
Power Supply Type	Electronic 48V
Dimming interface	Dimmer Integrated
Batteries inside	No

## Accessories & Power Supply



REQUIRED

F6482030


String Light Rose



REQUIRED

F6484030

String Light Floor switch




OPTIONAL

F6485030

String Light Kit cable

## Spare Parts

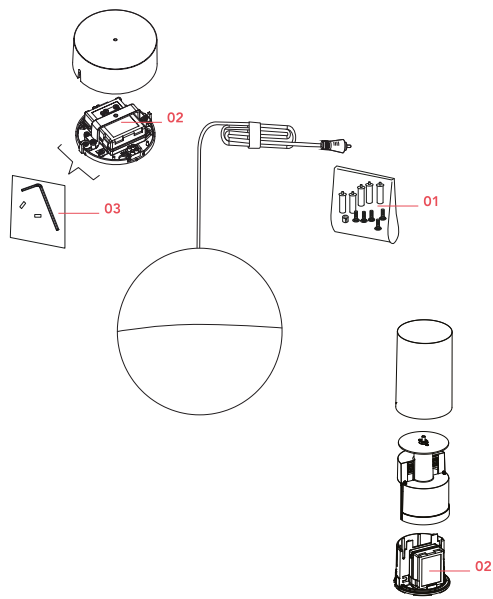

- |     |   |           |
|-----|---|-----------|
| 01. | String Light black hooks & cable clamps 5-unit kit      | RF6480130 |
| 02. | Power supply unit for led                               | RF22934   |
| 03. | Kit with allen key and screws for ceiling rose assembly | RF6480200 |



RF6480130  
String Light black hooks & cable  
clamps 5-unit kit



RF22934  
Power supply unit for led



RF6480200  
Kit with allen key and screws for  
ceiling rose assembly