



WEVER & DUCRÉ
LIGHTING

DEEP ASYM 1.0 LED

112461G5

Project _____
Type _____
Notes _____
Quantity _____
Date _____

GENERAL

Ceiling _____
Recessed _____
Gold _____
IP20 _____
Interior _____
467^a to 627^b lm _____

LED

3000 K _____
CRI 90 _____
L80 / 50000 h _____
3-step binning _____

OPTICAL

Flood _____

PHYSICAL

Diameter 94 mm _____
Height 95 mm _____
0.25 kg _____
Tilt min 35° _____
Tilt max 35° _____
Rotation 355° _____

ELECTRICAL




excl. power supply _____
18 V _____
Total connected power 7.9^a to 12^b W _____
LED Inset 5.9^a to 8.7^b W _____
52^b to 59^a lm/W _____
350^a to 500^b mA _____
PC3 _____
0.3 m _____

CUTOUT


Diameter 87 mm _____
Min. ceiling thickness 4 mm _____
Max. ceiling thickness 25 mm _____
Recessed depth 100 mm _____

^a 350mA

^b 500mA

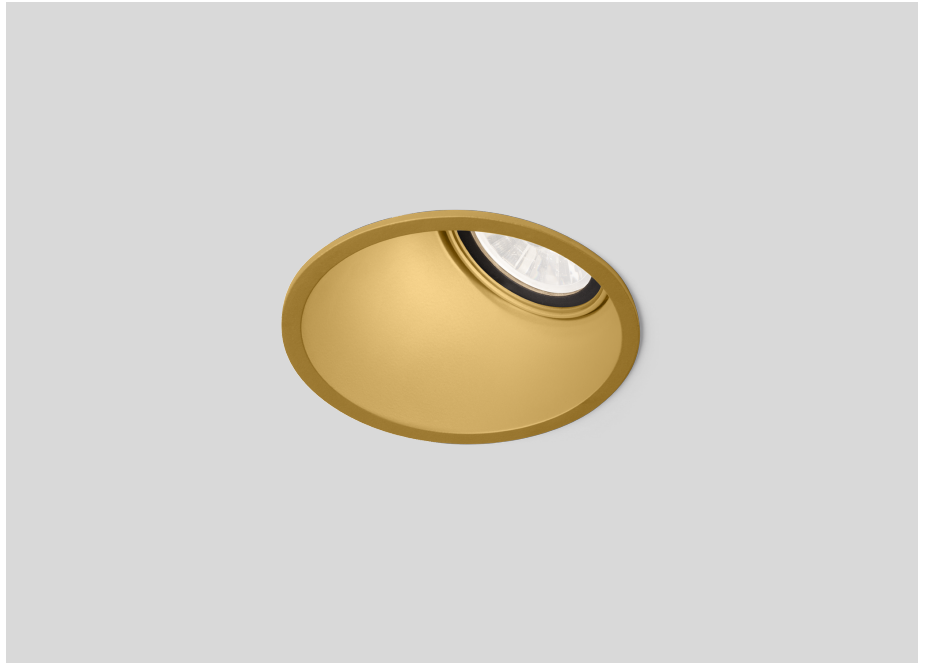

LIGHT DISTRIBUTION

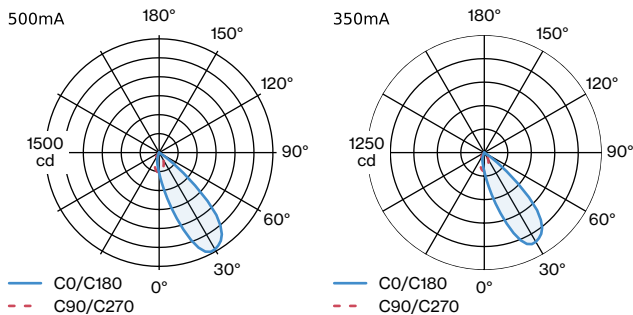



WEVER & DUCRÉ
LIGHTING

DEEP ASYM 1.0 LED

112461G5

ELECTRICAL

Power Supply 500mA

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
10W 11-20V	101.5-51-29.2	11 - 20V	9 0 2 1 4 4 0 5
15W 13.5-30V phase-cut dim 5-100%	102-51-30	13.5 - 30V	9 0 2 2 4 5 0 1
21W 28-42V phase-cut dim 5-100%	101.5-51-29.5	28 - 42V	9 0 2 2 4 7 0 1
10W 11-20V 1-10V dim	100-43-22.5	11 - 20V	9 0 2 3 4 4 0 1
20W 5-40V DALI 0-100%	111-52-22	5-40V	9 0 2 4 4 6 0 2
25W 20-50V DSI switch dim DALI 1-100%	130-43-31	20 - 50V	9 0 2 5 4 6 0 3

Power Supply 350mA | 500mA | 700mA

TYPE	L · W · H (MM)	ORDERCODE
20W 350mA 25-50V 500mA 20V-4 700mA 14V-28,5V	101.5-51-29.5	9 0 2 1 8 6 0 1

Power Supply 350mA

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
10W 14-28V 1-10V dim	101.5-51-29.5	14 - 28V	9 0 2 2 3 4 0 1
10W 12-28V phase-cut dim	102-38-21	12 - 28V	9 0 2 2 3 4 0 2
15W 21-42V phase-cut dim	101.5-51-29.5	21 - 42V	9 0 2 2 3 5 0 3