



WEVER & DUCRÉ
LIGHTING

DEEP bijou 1.0

165161G3

GENERAL

Ceiling
Recessed
Gold
IP20
Interior
330 lm

LED

2700 K
CRI 90
L80 / 50000 h
3-step binning

OPTICAL

Flood
Beam angle 30°

PHYSICAL

Diameter 56 mm
Height 50 mm
0.065 kg




ELECTRICAL

excl. power supply
18 V
Total connected power 6 W
LED Inset 4.5 W
55 lm/W
250 mA
PC3
0.3 m


CUTOUT

Diameter 50-52 mm
Min. ceiling thickness 4 mm
Max. ceiling thickness 25 mm
Recessed depth 85 mm

Project
Type
Notes
Quantity
Date

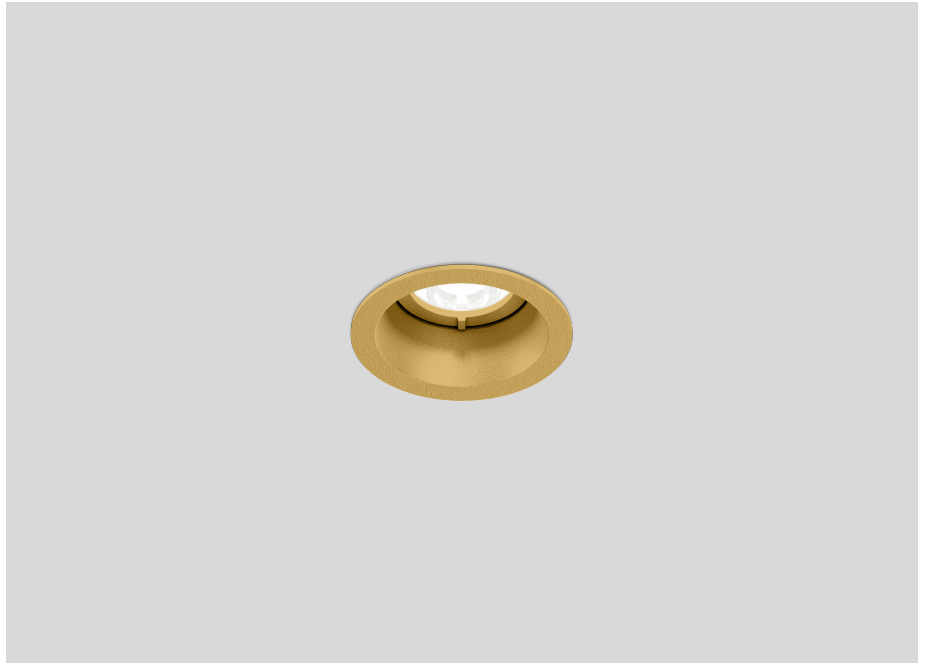

LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

DEEP bijou 1.0

165161G3

CONE DIAGRAM

flood 30°

h (m)	E0° (lx)	ø (m)
1	962	0.54
2	241	1.07
3	107	1.61
4	60	2.15
5	38	2.68

Electrical

Power Supply 250mA

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
10W 16-29V phase-cut dim	122 · 41 · 23	16 - 29V	9 0 2 2 6 4 0 1
15W 26-42V phase-cut dim	122 · 41 · 23	26 - 42V	9 0 2 2 6 5 0 1