



WEVER & DUCRÉ
LIGHTING

DEEPER IP44 1.0 LED

152261B5

Project _____
Type _____
Notes _____
Quantity _____
Date _____

GENERAL

Ceiling _____
Recessed _____
Jet Black _____
IP44 _____
Interior _____
418^a to 565^b lm _____
9005^c _____

LED

3000 K _____
CRI 90 _____
L80 / 50000 h _____
3-step binning _____

OPTICAL

Flood _____
Beam angle 36° _____

PHYSICAL

Diameter 85 mm _____
Height 95 mm _____
0.17 kg _____

ELECTRICAL

excl. power supply _____
18 V _____
Total connected power 7.9^a to 12^b W _____
LED Inset 5.9^a to 8.7^b W _____
47^b to 53^a lm/W _____
350^a to 500^b mA _____
PC3 _____
0.3 m _____

CUTOUT

Diameter 76-79 mm _____
Min. ceiling thickness 4 mm _____
Max. ceiling thickness 38 mm _____
Recessed depth 95 mm _____


^a 350mA

^b 500mA


^c RAL Palette colors may deviate slightly due to production conditions.



IP44  



LIGHT DISTRIBUTION

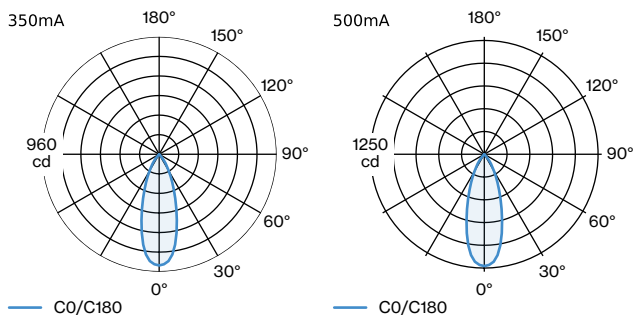



WEVER & DUCRÉ
LIGHTING

DEEPER IP44 1.0 LED

152261B5

CONE DIAGRAM

flood 36° 350mA			flood 36° 500mA		
h (m)	E0° (lx)	ø (m)	h (m)	E0° (lx)	ø (m)
1	909	0.65	1	1230	0.65
2	227	1.29	2	307	1.29
3	101	1.94	3	136	1.94
4	56	2.58	4	76	2.58
5	36	3.23	5	49	3.23

ELECTRICAL

Power Supply 500mA

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
10W 11-20V	101.5-51-29.2	11 - 20V	9 0 2 1 4 4 0 5
15W 13.5-30V phase-cut dim 5-100%	102-51-30	13.5 - 30V	9 0 2 2 4 5 0 1
10W 10-20V 1-10V dim	100-43-22.5	11 - 20V	9 0 2 3 4 4 0 1
20W 5-40V DALI 0-100%	111-52-22	5-40V	9 0 2 4 4 6 0 2

Power Supply 350mA

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
10W 14-28V 1-10V dim	101.5-51-29.5	14 - 28V	9 0 2 2 3 4 0 1
10W 12-28V phase-cut dim	102-38-21	12 - 28V	9 0 2 2 3 4 0 2