


ARIK

472-260030

ARIK SHORT SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, black matt, similar to RAL 9005, acrylic glass cover satined, light output direct, with converter, dimmability: not dimmable, IP20




DRAWING

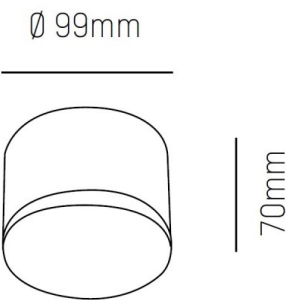

TECHNICAL DETAILS

System perform. [W]	12
Bulb type	LED
Luminous flux [lm]	744
Colour temp. [K]	3000K
CRI	>90
Optics	acrylic glass cover
Converter	with converter
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	70
Diameter [mm]	99
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,49
Colour lamp	black matt
RAL	9005
Colour of glass/shade	satined
EAN-Number	9010506325126
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	F

LIGHT DISTRIBUTION CURVE

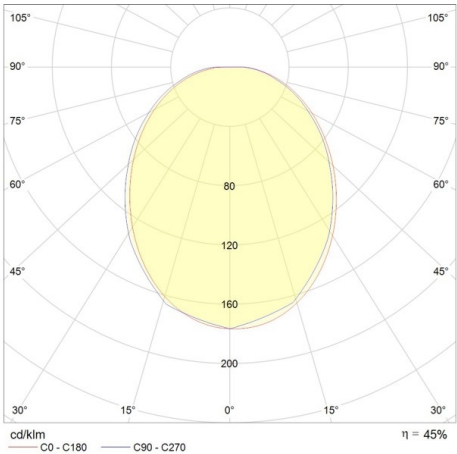

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.