


FEATURES

- BJB lens technology
- High efficacy (up to 142 Lm/W)
- Low UGR <19 (3700 Lm)

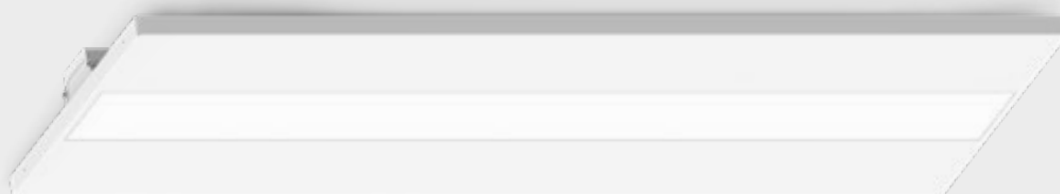


Cortina 2L 1195x295 LV

SPECIFICATIONS

Colour	Ceiling plate: Matt white RAL 9010
Beam angle (FWHM)	Diffuser 80°
UGR (4H8H 70/50/20)	<19
Fixture material	Housing: Steel / Lens: Polycarbonate / Diffuser: PMMA
Environment	Indoor
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C ¹
Safety marks	EN60598 / EN62031 / EN 62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years * (within the European Union and the countries of the Free Trade Association for products delivered after 1 May 2015)
Energy class	These products contains a light source of energy efficiency class F (3000K) / E (4000K)

This luminaire contains built-in LED lamps. There are no exchangeable parts inside the luminaire. EU 874/2012

¹ In applications with a flat roof (fi. car showrooms) the temperatures may exceed 45°C. Please ask our sales office for a special driver.



IP20

ITEM SPECIFICATIONS (PART A)

Description	Item code chrome	Input	mA	W	Lm	Lm/W	CRI (typ.)	UGR	Pf	Ripple	Inrush current	B-16A Fuse
Cortina 2L 1195x295 3500Lm 3000K No dim	CAC403MWSG02	220-240V	700	27,1	3500	129	83	18.0	0.95	<3%	5A 50μS	50 pcs
Cortina 2L 1195x295 3500Lm 3000K 1-10V & Push	CAC403MWSM02	220-240V	700	27,1	3500	129	83	18.0	0.95	<3%	5A 50μS	50 pcs
Cortina 2L 1195x295 3500Lm 3000K Dali	CAC403MWSK02	220-240V	700	27,1	3500	129	83	18.0	0.95	<3%	5A 50μS	50 pcs
Cortina 2L 1195x295 5050Lm 3000K No dim	CAC403MWTRO2	220-240V	1050	41,8	5050	121	83	19.3	0.95	<3%	5A 50μS	50 pcs
Cortina 2L 1195x295 5050Lm 3000K 1-10V & Push	CAC403MWTTO2	220-240V	1050	41,8	5050	121	83	19.3	0.95	<3%	5A 50μS	50 pcs
Cortina 2L 1195x295 5050Lm 3000K Dali	CAC403MWTVO2	220-240V	1050	41,8	5050	121	83	19.3	0.95	<3%	5A 50μS	50 pcs
Cortina 2L 1195x295 3700Lm 4000K No dim	CAC403MWSH02	220-240V	700	27,1	3700	137	83	18.2	0.95	<3%	5A 50μS	50 pcs
Cortina 2L 1195x295 3700Lm 4000K 1-10V & Push	CAC403MWSN02	220-240V	700	27,1	3700	137	83	18.2	0.95	<3%	5A 50μS	50 pcs
Cortina 2L 1195x295 3700Lm 4000K Dali	CAC403MWSL02	220-240V	700	27,1	3700	137	83	18.2	0.95	<3%	5A 50μS	50 pcs
Cortina 2L 1195x295 5300Lm 4000K No dim	CAC403MWSO2	220-240V	1050	41,8	5300	127	83	19.5	0.95	<3%	5A 50μS	50 pcs
Cortina 2L 1195x295 5300Lm 4000K 1-10V & Push	CAC403MWTO2	220-240V	1050	41,8	5300	127	83	19.5	0.95	<3%	5A 50μS	50 pcs
Cortina 2L 1195x295 5300Lm 4000K Dali	CAC403MWTWO2	220-240V	1050	41,8	5300	127	83	19.5	0.95	<3%	5A 50μS	50 pcs

ITEM SPECIFICATIONS (PART B)


Description	Safety class	Energy class	Weight	Dimensions single carton	Quantity per pallet	Expected lifespan B10 reported (25°C)		
						L70B10	L80B10	L90B10
Cortina 2L 1195x295 3500Lm 3000K No dim	II	F	4980 gr	1210x310x90 mm	42 pcs	>54.000 hrs	>54.000 hrs	>54.000 hrs
Cortina 2L 1195x295 3500Lm 3000K 1-10V & Push	II	F	4980 gr	1210x310x90 mm	42 pcs	>54.000 hrs	>54.000 hrs	>54.000 hrs
Cortina 2L 1195x295 3500Lm 3000K Dali	II	F	4980 gr	1210x310x90 mm	42 pcs	>54.000 hrs	>54.000 hrs	>54.000 hrs
Cortina 2L 1195x295 5050Lm 3000K No dim	I	F	4980 gr	1210x310x90 mm	42 pcs	>54.000 hrs	>54.000 hrs	>54.000 hrs
Cortina 2L 1195x295 5050Lm 3000K 1-10V & Push	II	F	4980 gr	1210x310x90 mm	42 pcs	>54.000 hrs	>54.000 hrs	>54.000 hrs
Cortina 2L 1195x295 5050Lm 3000K Dali	II	F	4980 gr	1210x310x90 mm	42 pcs	>54.000 hrs	>54.000 hrs	>54.000 hrs
Cortina 2L 1195x295 3700Lm 4000K No dim	II	E	4980 gr	1210x310x90 mm	42 pcs	>54.000 hrs	>54.000 hrs	>54.000 hrs
Cortina 2L 1195x295 3700Lm 4000K 1-10V & Push	II	E	4980 gr	1210x310x90 mm	42 pcs	>54.000 hrs	>54.000 hrs	>54.000 hrs
Cortina 2L 1195x295 3700Lm 4000K Dali	II	E	4980 gr	1210x310x90 mm	42 pcs	>54.000 hrs	>54.000 hrs	>54.000 hrs
Cortina 2L 1195x295 5300Lm 4000K No dim	I	E	4980 gr	1210x310x90 mm	42 pcs	>54.000 hrs	>54.000 hrs	>54.000 hrs
Cortina 2L 1195x295 5300Lm 4000K 1-10V & Push	II	E	4980 gr	1210x310x90 mm	42 pcs	>54.000 hrs	>54.000 hrs	>54.000 hrs
Cortina 2L 1195x295 5300Lm 4000K Dali	II	E	4980 gr	1210x310x90 mm	42 pcs	>54.000 hrs	>54.000 hrs	>54.000 hrs

All values are measured at 230V (+/- 7%).

CHOOSE YOUR LUMEN OUTPUT


Item	mA	W	Lumen Output		Lumen / Watt		UGR		Driver types			
			3000K	4000K	3000K	4000K	3000K	4000K	No dim	1-10V&Push	Dali	Casambi
Special request	500	19,0	2600	2700	137	142	17.4	17.6	127570	127021	127576	127630
Standard	700	27,1	3500	3700	129	137	18.5	18.7	127480N	127021	127576	127630
Special request	900	35,4	4400	4600	124	130	19.3	19.4	127484N	127021	127490	127630
Standard	1050	41,8	5050	5300	121	127	19.7	19.9	127484N	127021	127490	127630
Special request	1200	48,4	5700	5950	118	123	20.2	20.3	127690	123170	123170	x

DIMENSIONS

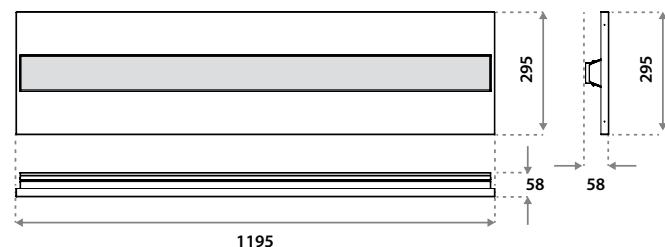

OPTIONAL PLUG & PLAY CABLES

Description	Class	Length	Item code	Length	Item code	Length	Item code
A Euro plug incl. cable	II	0.3 m	x	2.0 m	015203BL1200	3.0 m	x
B Schuko plug incl. cable	I	0.3 m	x	1.5 m	1C5203BLA000	3.0 m	x
C UK plug incl. cable	II	0.3 m	x	2.0 m	0A5203BL1200	3.0 m	x
D GST18-3 male incl. cable 2x0.75mm ²	II	0.3 m	455203BL0000	2.0 m	x	3.0 m	455203BL1500
D GST18-3 male incl. cable 3x0.75mm ²	I	0.3 m	4A5203BL0000	2.0 m	x	3.0 m	4A5203BL1500
E 1-10V/Dali GST18-5 male incl. cable 4x0.75mm ²	II	0.3 m	655203BL0000	2.0 m	x	3.0 m	655203BL1500
E 1-10V/Dali GST18-5 male incl. cable 5x0.75mm ²	I	0.3 m	6A5203BL0000	2.0 m	x	3.0 m	6A5203BL1500
F 1-10V/Dali BST14i male incl. cable	III	0.5 m	095203BL0000	2.0 m	x	3.0 m	095203BL1500
G GST18-3 T-splitter male incl. cable	II	0.2 m	459203BL0000	2.0 m	x	3.0 m	x
G GST18-3 T-splitter male incl. cable	I	0.2 m	4A9203BL0000	2.0 m	x	3.0 m	x
H GST18-5 T-splitter male	I / II	x	659203BU0000	2.0 m	x	3.0 m	x
I 1-10V/Dali BST14i T-splitter male incl. cable	III	0.2 m	099203BL0000	2.0 m	x	3.0 m	x
J LV plug to RJ45 plug	III	0.2 m	675205BL0000	2.0 m	x	3.0 m	x

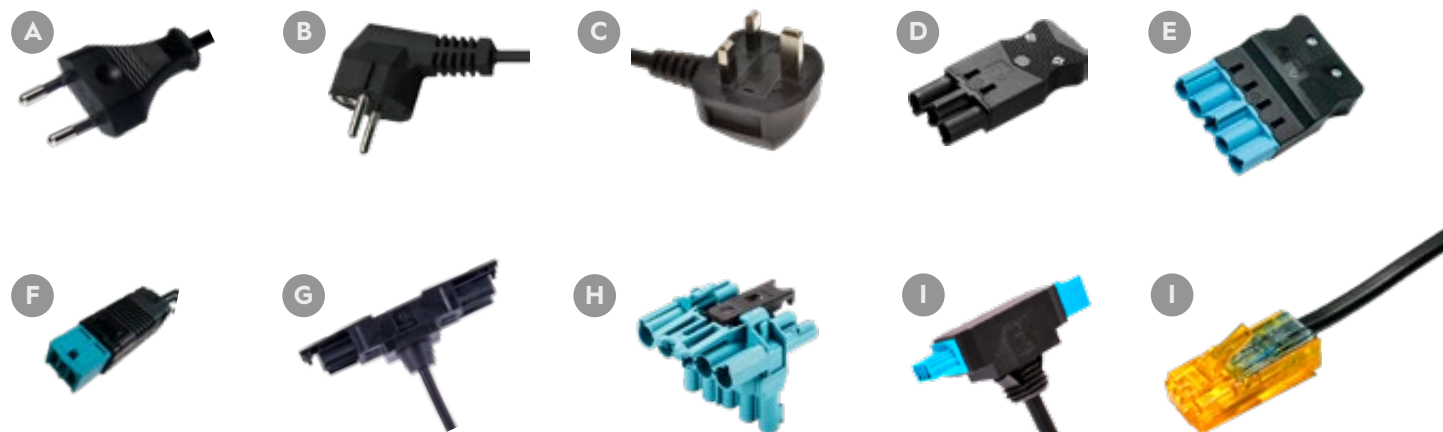

EXAMPLE PLUG & PLAY

