


DELIA

789-53316


DELIA WALL / CEILING LUMINAIRE made of steel sheet, white, similar to RAL 9003, polycarbonate cover satined white, light output direct, with converter, dimmability: not dimmable, without motion detector, IP54



DRAWING

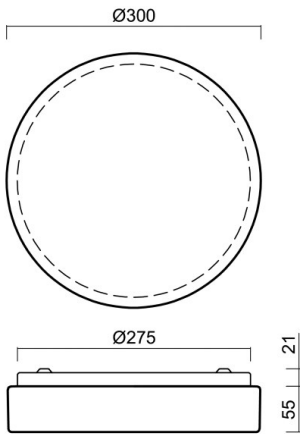

LIGHT DISTRIBUTION CURVE

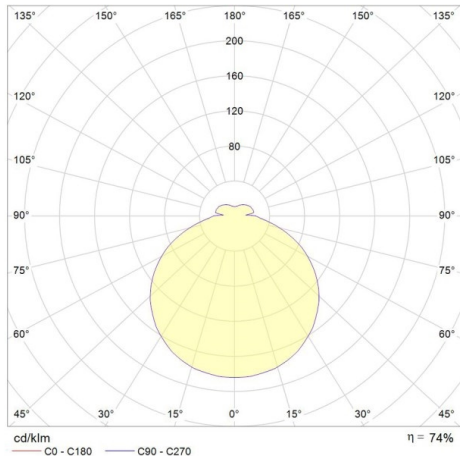

TECHNICAL DETAILS

System perform. [W]	19
Bulb type	LED
Luminous flux [lm]	1920
Colour temp. [K]	3000K
CRI	>80
Optics	polycarbonate cover
Converter	with converter
Dimming	not dimmable
Motion detector	without motion detector
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	steel sheet
Height [mm]	75
Diameter [mm]	300
IP protection class	IP54
Voltage class	protection cl. I
Shock resistance	IK10
Net weight [kg]	1,10
Colour lamp	white
RAL	9003
Colour of glass/shade	satined white
EAN-Number	8591728533168
Lifetime [h]	50 000
Energy efficiency cl.	D
No. of luminaires B16A	52



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.