


DESCO

341-t2419150


DESCO S TRACK TRACK SPOTLIGHT WITH 3 PH ADAPTER made of aluminium, white, similar to RAL 9003, satined PMMA opal diffuser beam 115°, light output direct, with converter, max. 500mA, dimmability: not dimmable, adapter/ceiling base white, IP20



DRAWING

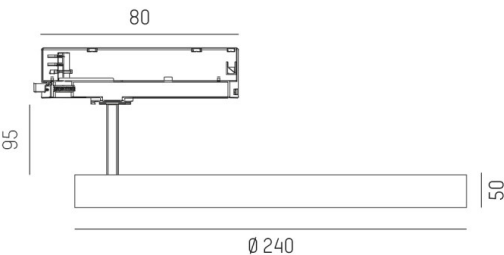

LIGHT DISTRIBUTION CURVE

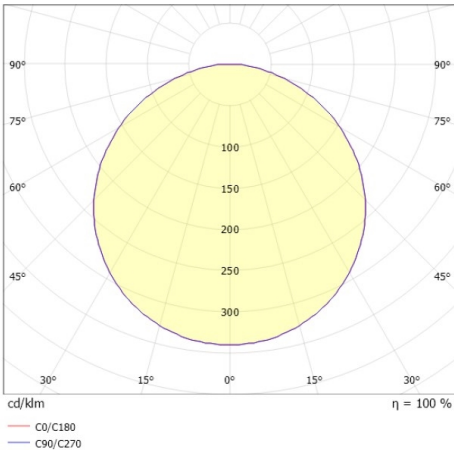

TECHNICAL DETAILS

System perform. [W]	15
Bulb type	LED
Luminous flux [lm]	850/935/940
Current sec. [mA]	500
Colour temp. [K]	2700K/3000K/4000K
CRI	>90
Optics	PMMA opal diffuser
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	115°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	50
Diameter [mm]	240
IP protection class	IP20
Voltage class	protection cl. I
Shock resistance	IK02
Net weight [kg]	0,79
Colour lamp	white
RAL	9003
Colour adapter/ceiling base	white
EAN-Number	9010506782561
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	E
No. of luminaires B16A	22



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.