



# FIT

# 757-625pm30fitwok


FIT RECESSED CEILING LUMINAIRE made of aluminium, white, satined PMMA opal diffuser light output direct, without converter, max. 900/1200mA, dimmability: see converter, IP40

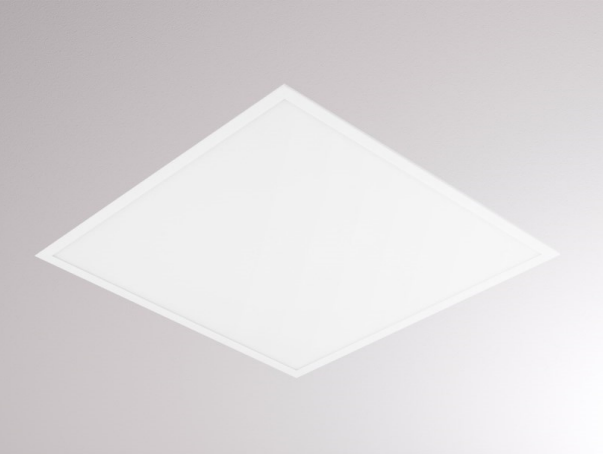

## DRAWING

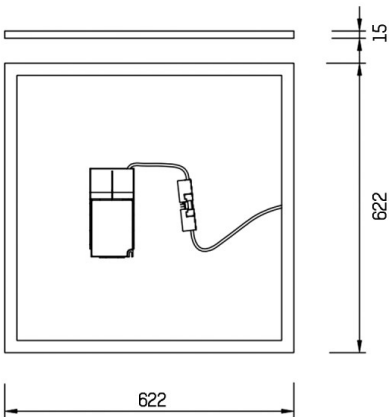

## LIGHT DISTRIBUTION CURVE

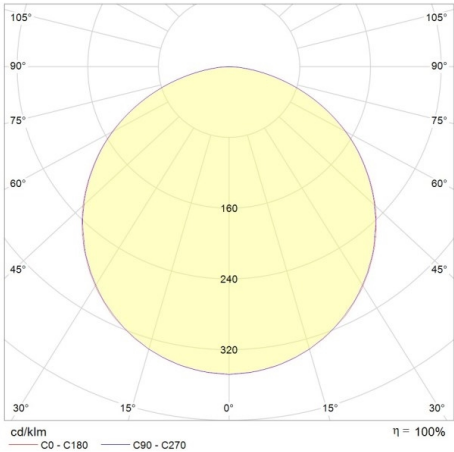

## TECHNICAL DETAILS

|                       |                    |
|-----------------------|--------------------|
| System perform. [W]   | 35/57              |
| Bulb type             | LED 35W/57W        |
| Luminous flux [lm]    | 4400/5500          |
| Current sec. [mA]     | 900/1200           |
| Colour temp. [K]      | 3000K              |
| CRI                   | >80                |
| Optics                | PMMA opal diffuser |
| Converter             | without converter  |
| Dimming               | see converter      |
| Light output          | direct             |
| Material              | aluminium          |
| Length [mm]           | 622                |
| Width [mm]            | 622                |
| Height [mm]           | 15                 |
| Recess depth [mm]     | 55                 |
| IP protection class   | IP40               |
| Voltage class         | protection cl. II  |
| Net weight [kg]       | 2,65               |
| Colour lamp           | white              |
| EAN-Number            | 8596099058852      |
| Lifetime [h]          | 80 000             |
| Energy efficiency cl. | D                  |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.