



FIT LONG

757-1250pm30fitwok


FIT LONG RECESSED CEILING LUMINAIRE made of aluminium, white, satined PMMA opal diffuser light output direct, without converter, max. 900/1200mA, dimmability: see converter, IP40

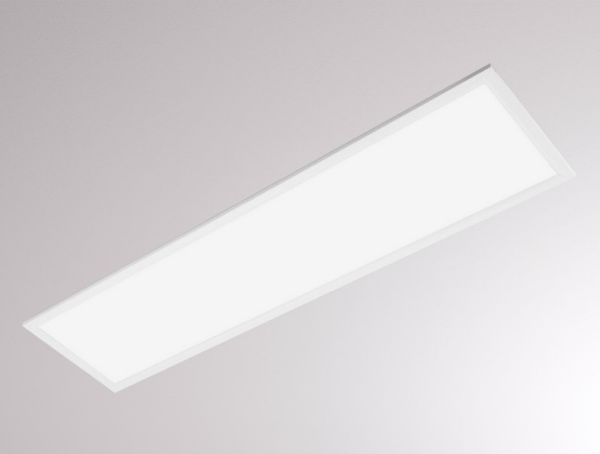

DRAWING

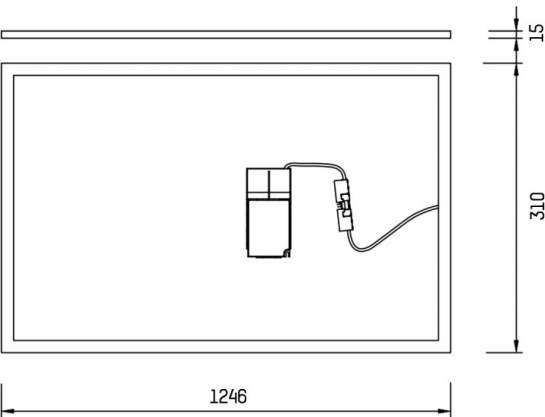

LIGHT DISTRIBUTION CURVE

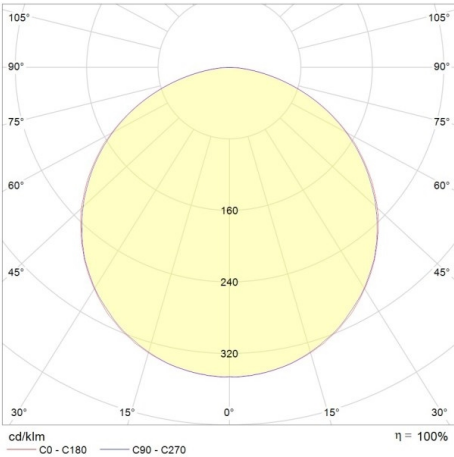

TECHNICAL DETAILS

System perform. [W]	35/57
Bulb type	LED 35W/57W
Luminous flux [lm]	4100/5500
Current sec. [mA]	900/1200
Colour temp. [K]	3000K
CRI	>80
Optics	PMMA opal diffuser
Converter	without converter
Dimming	see converter
Light output	direct
Material	aluminium
Length [mm]	1246
Width [mm]	310
Height [mm]	15
Recess depth [mm]	55
IP protection class	IP40
Voltage class	protection cl. II
Net weight [kg]	2,95
Colour lamp	white
EAN-Number	8596099058913
Lifetime [h]	80 000
Energy efficiency cl.	D



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.