

LIRO

472-30003560

LIRO R RECESSED SPOTLIGHT made of aluminium, white black, similar to RAL 9003/9005, beam 10°, light output direct, without converter, max. 500mA, dimmability: see converter, IP20



DRAWING




45°


1 - 20 mm



62 x 62 mm, **ET 65 mm**

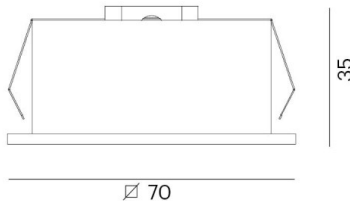

LIGHT DISTRIBUTION CURVE

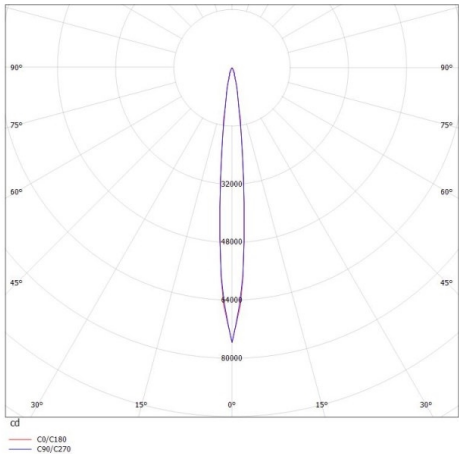

TECHNICAL DETAILS

Bulb type	LED 6W
Luminous flux [lm]	460
Current sec. [mA]	500
Colour temp. [K]	2700K
CRI	>90
Converter	without converter
Dimming	see converter
Light output	direct
Beam angle [°]	10°
Voltage [V]	12 VDC
Material	aluminium
Length [mm]	70
Width [mm]	70
Height [mm]	35
Ceiling cutout [mm]	62x62
Recess depth [mm]	65
IP protection class	IP20
Voltage class	protection cl. III
Net weight [kg]	0,10

Colour lamp	white black
RAL	9003/9005
EAN-Number	9010506139624
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	G



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.