


LIRO

472-20073560

LIRO SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, white black, similar to RAL 9003/9005, beam 10°, light output direct, with converter, dimmability: not dimmable, IP20




DRAWING



TECHNICAL DETAILS

System perform. [W]	10
Bulb type	LED
Luminous flux [lm]	620
Colour temp. [K]	2700K
CRI	>90
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	10°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	60
Width [mm]	60
Height [mm]	70
IP protection class	IP20
Voltage class	protection cl. III
Net weight [kg]	0,30
Colour lamp	white black
RAL	9003/9005
EAN-Number	9010506139532
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	G

LIGHT DISTRIBUTION CURVE

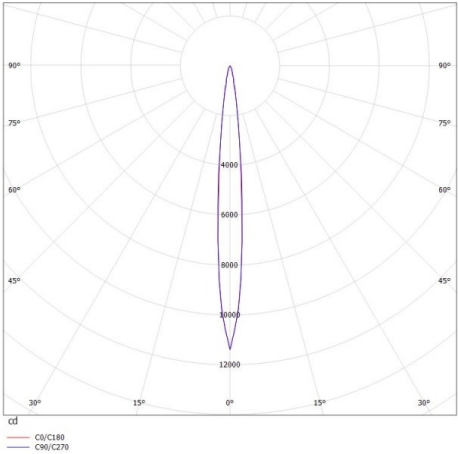

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.