


# MATAR

789-71040

MATAR 2 WALL / CEILING LUMINAIRE made of aluminium, white, satined PMMA opal diffuser satined white, with converter, dimmability: not dimmable, IP44




## DRAWING

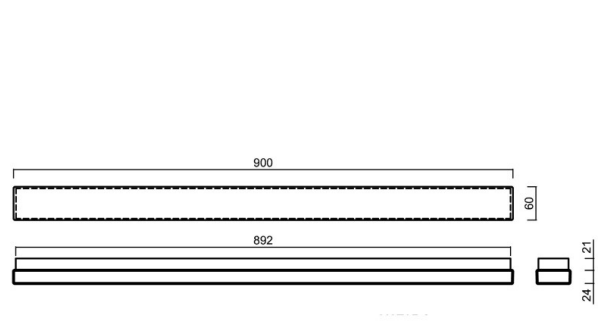

## TECHNICAL DETAILS

System perform. [W]	19
Bulb type	LED
Luminous flux [lm]	2090
Colour temp. [K]	3000K
CRI	>80
Optics	PMMA opal diffuser
Converter	with converter
Dimming	not dimmable
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	900
Width [mm]	60
Height [mm]	46
IP protection class	IP44
Voltage class	protection cl. I
Shock resistance	IK10
Net weight [kg]	0,98
Colour lamp	white
Colour of glass/shade	satined white
EAN-Number	8591728710408
Energy efficiency cl.	D

## LIGHT DISTRIBUTION CURVE

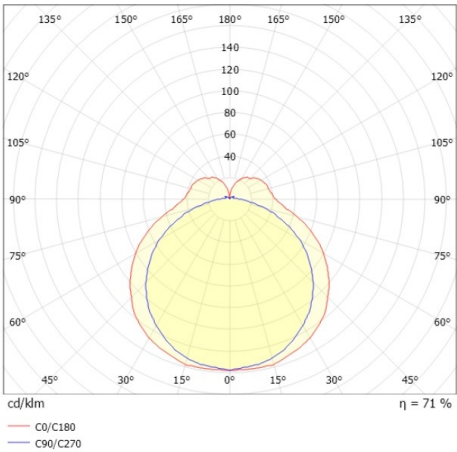

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.