


NEXT

472-291008ag


NEXT W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, anthrazite, similar to RAL 7016, light output direct / indirect, with converter, dimmability: not dimmable, IP54



DRAWING



LIGHT DISTRIBUTION CURVE

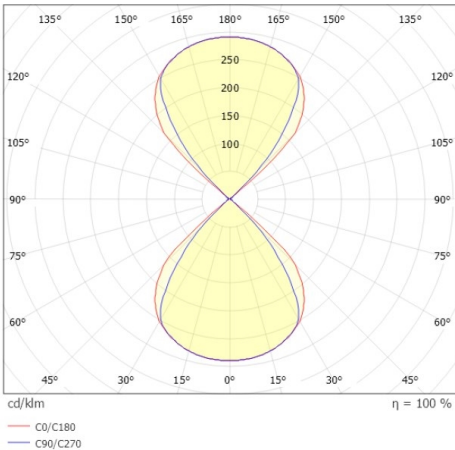

TECHNICAL DETAILS

System perform. [W]	7,5
Bulb type	LED
Luminous flux [lm]	570
Colour temp. [K]	3000K
CRI	>90
Converter	with converter
Dimming	not dimmable
Light output	direct / indirect
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	100
Width [mm]	100
Height [mm]	100
Troat [mm]	100
IP protection class	IP54
Voltage class	protection cl. I
Net weight [kg]	0,96
Colour lamp	anthrazite
RAL	7016
EAN-Number	9008905803727
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	D



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.