


# PAN

305-0130380003004


PAN RECESSED WALL LUMINAIRE made of aluminium, silver, similar to RAL 9006, light output direct, without converter, max. 250mA, dimmability: see converter, IP20



## DRAWING

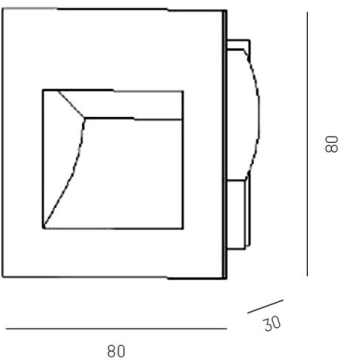

## LIGHT DISTRIBUTION CURVE

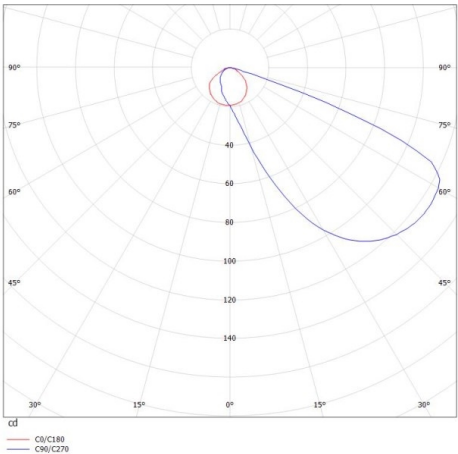

## TECHNICAL DETAILS

Bulb type	LED 3W
Luminous flux [lm]	155
Current sec. [mA]	250
Colour temp. [K]	3000K
CRI	>80
Converter	without converter
Dimming	see converter
Light output	direct
Voltage [V]	9 VDC
Material	aluminium
Length [mm]	80
Width [mm]	80
Height [mm]	30
Ceiling cutout [mm]	69x69
Recess depth [mm]	62
IP protection class	IP20
Voltage class	protection cl. III
Net weight [kg]	0,15
Colour lamp	silver
RAL	9006
EAN-Number	9008905918582
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	E



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.