


# POLUS

276-0091190003063

POLUS SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, black gold matt, similar to RAL 9005/1036, light output direct, with converter, dimmability: not dimmable, IP44




## DRAWING

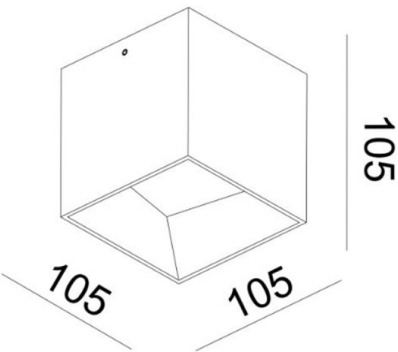

## TECHNICAL DETAILS

System perform. [W]	12
Bulb type	LED
Luminous flux [lm]	750
Colour temp. [K]	3000K
CRI	>90
Converter	with converter
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	105
Width [mm]	105
Height [mm]	105
IP protection class	IP44
Voltage class	protection cl. I
Net weight [kg]	0,71
Colour lamp	black gold matt
RAL	9005/1036
EAN-Number	9008905906565
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	F

## LIGHT DISTRIBUTION CURVE

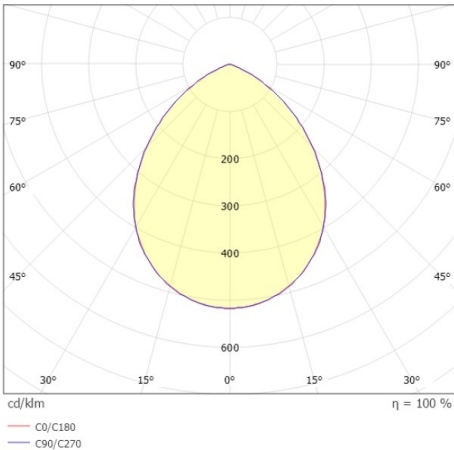

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.