


# PONTOS

305-619924w


PONTOS ROUND RECESSED SPOTLIGHT made of aluminium, white, similar to RAL 9003, beam 24°, light output direct, tilting 30°, without converter, max. 350mA, dimmability: see converter, IP44/IP20



## DRAWING

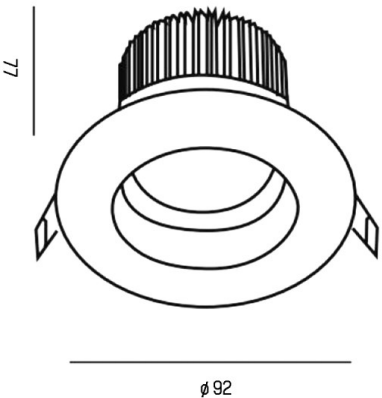

## LIGHT DISTRIBUTION CURVE

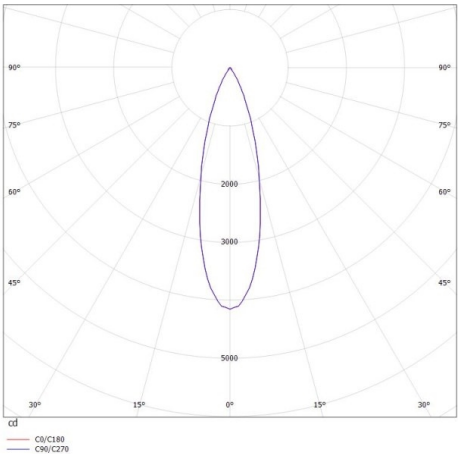

## TECHNICAL DETAILS

|                       |                    |
|-----------------------|--------------------|
| System perform. [W]   | 10/15              |
| Bulb type             | LED 15W            |
| Luminous flux [lm]    | 840/1280           |
| Current sec. [mA]     | 350                |
| Colour temp. [K]      | 3000K              |
| CRI                   | >80                |
| Converter             | without converter  |
| Dimming               | see converter      |
| Light output          | direct             |
| Beam angle [°]        | 24°                |
| Voltage [V]           | 36 VDC             |
| Material              | aluminium          |
| Height [mm]           | 80                 |
| Diameter [mm]         | 90                 |
| Ceiling cutout [mm]   | 83                 |
| Recess depth [mm]     | 110                |
| IP protection class   | IP44/IP20          |
| Voltage class         | protection cl. III |
| Net weight [kg]       | 0,20               |
| Colour lamp           | white              |
| RAL                   | 9003               |
| EAN-Number            | 9010506044898      |
| Lifetime [h]          | L80 B10 20 000     |
| Energy efficiency cl. | E                  |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.