

PONTOS

305-624836b27k

PONTOS SQUARE RECESSED SPOTLIGHT made of aluminium, black matt, similar to RAL 9005, beam 36°, light output direct, tilting 30°, without converter, max. 350mA, dimmability: see converter, IP44/IP20




DRAWING

TECHNICAL DETAILS

Bulb type	LED 15W
Luminous flux [lm]	810/1250
Current sec. [mA]	350
Colour temp. [K]	2700K
CRI	>80
Converter	without converter
Dimming	see converter
Light output	direct
Beam angle [°]	36°
Voltage [V]	36 VDC
Material	aluminium
Length [mm]	89
Width [mm]	89
Height [mm]	80
Ceiling cutout [mm]	78x78
Recess depth [mm]	110
IP protection class	IP44/IP20
Voltage class	protection cl. III
Net weight [kg]	0,30
Colour lamp	black matt
RAL	9005
EAN-Number	9010506045055
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	E

LIGHT DISTRIBUTION CURVE

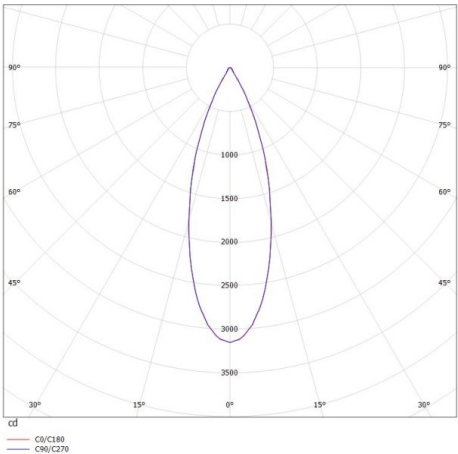

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.