



Description

Sfera Portable is a new rechargeable outdoor light that comes in two sizes. It is one of the latest additions to the BROKIS outdoor lighting portfolio. Sfera Portable is based on the idea of a small spheres of light set within a poured concrete base with the same subtle multiangular detail used throughout the Sfera family. The delicate sphere of handblown matte or gloss glass resides beneath a stainless-steel hoop, which serves as a handle for moving the light from one place to another. The concrete base houses not only the charging module but also a sensitive touch dimmer with which to adjust the brightness. Sfera Portable is fitted with an LED light source with diffusor and meets the safety and technological standards of the IP44 rating for outdoor use.

Tech. description

Sfera Portable is a portable battery-powered light suitable for outdoor use. The light features a USB-C connector for wired charging as well as an integrated wireless charging system. On, off, and dimming are touch controlled. The base of the light is made of concrete containing a high proportion of glass shards from Janštejn Glassworks. The base also houses the electronics with LED module.




Colours options: https://brokis.sharepoint.com/:b:/s/brokis_sp/Ef2PhYLOeXNFIG_UoWnartEBspLqfsGyu_tRoEMADqxsuA

CONSTRUCTION SPECIFICATION

Weight:	1.6 kg
Construction material:	glass, metal, concrete
Cord length [mm]:	-
Mounting:	Table
Environment:	Outdoor

DIMENSIONS [mm]



ELECTRICAL SPECIFICATION

Charging:	5 V, 2A max.
Connector:	USB-C
Charging time:	4 hod.
Lighting time:	+/- 5 hod.
Max. power [W]:	2.4 W LED
Coverage IP:	20
Socket:	G4/12V
Light source:	-
Energy class:	E
Protection class:	3

CERTIFICATIONS




BROKIS®

BROKIS S.R.O.
ŠPANILOVA 1315/25
163 00 PRAHA 6 - ŘEPY
CZECH REPUBLIC

ORG ID 64940799
VAT ID CZ64940799
C 42174 MĚSTSKÝ SOUD
V PRAZE

TEL +420 567 211 517
TECHNICAL@BROKIS.CZ
INFO@BROKIS.CZ
WWW.BROKIS.CZ

2022_10
PAGE 1

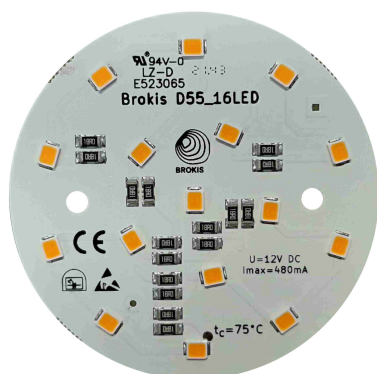

CM14300

Type	LED module
Lamp wattage [W]	2,4 W
Input voltage [V]	12 VDC
Energy class	E
Flux [lm]	310 lm
Light colour [K]	2700 K
CRI	93
Dimmable	yes