


TURN 2

472-256011

TURN 2 SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, anthrazite, similar to RAL 7016, light output direct, tilting 90°, dimmability: not dimmable, IP54



DRAWING

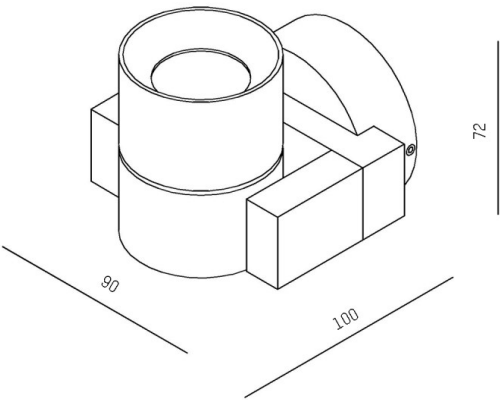

TECHNICAL DETAILS

Bulb type	QPAR 16 35W
No.of bulb holders	1x
Socket	GU10
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	90
Width [mm]	88
Height [mm]	115
Troat [mm]	115
IP protection class	IP54
Voltage class	protection cl. I
Net weight [kg]	0,72
Colour lamp	anthrazite
RAL	7016
EAN-Number	9010506027266

LIGHT DISTRIBUTION CURVE



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.