


# VUTO

222-00111

VUTO PD SUSPENSION made of aluminium, shiny black, microprismatic PMMA cover for perfect anti-glare light output direct, with converter, dimmability: DALI 2, Push, cable black, adapter/ceiling base black, pendant length 4000mm, IP20




## DRAWING

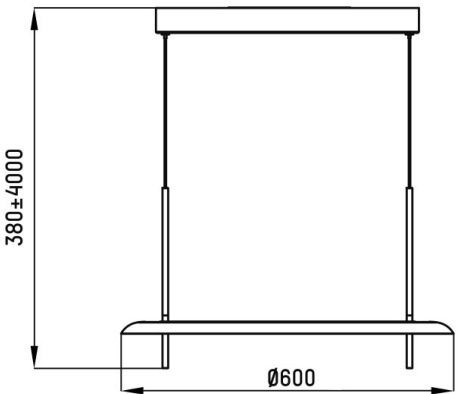

## TECHNICAL DETAILS

System perform. [W]	34,5
Bulb type	LED
Luminous flux [lm]	905
Colour temp. [K]	2700K
CRI	>90
Optics	microprismatic cover
Converter	with converter
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Pendant length [mm]	4000
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	4,00
Colour lamp	shiny black
Colour adapter/ceiling base	black
Electric wire	black
EAN-Number	9010870568167
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	F
No. of luminaires B16A	27

## LIGHT DISTRIBUTION CURVE

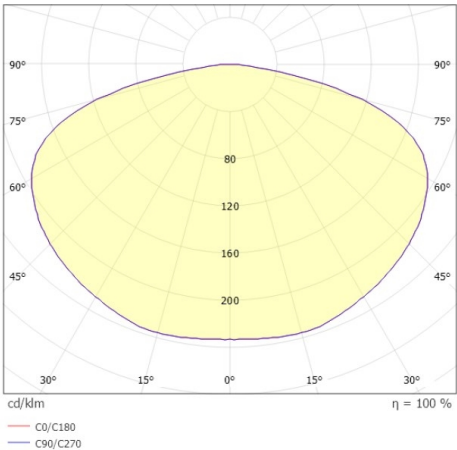

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.