


WALL 68R

222-00105

WALL 68R SINA IP RECESSED WALL / CEILING LUMINAIRE made of aluminium, white, similar to RAL 9003, transparent glass beam asymmetric, light output direct, with converter, max. 170mA, dimmability: 3 Step Touch Dim, through wiring 3x1,5mm², IP44/IP20



DRAWING

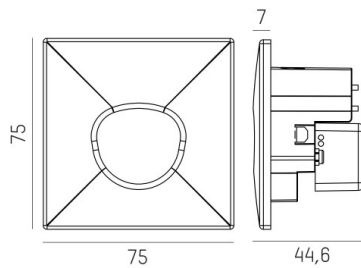


TECHNICAL DETAILS

| | |
|---------------------|----------------------|
| System perform. [W] | 4 |
| Bulb type | LED |
| Luminous flux [lm] | 140 |
| Current sec. [mA] | 170 |
| Colour temp. [K] | 2700K/3000K/4000K |
| CRI | >90 |
| Optics | transparent glass |
| Designer | INHOUSE |
| Converter | with converter |
| Light output | direct |
| Beam angle [°] | asymmetrisch |
| Voltage [V] | 220-240V 50Hz |
| Through wiring | 3x1,5mm ² |
| Material | aluminium |

| | |
|---------------------|------------------|
| Height [mm] | 44,6 |
| Diameter [mm] | 75 |
| Ceiling cutout [mm] | 68 |
| Recess depth [mm] | 45 |
| IP protection class | IP44/IP20 |
| Voltage class | protection cl. I |
| Shock resistance | IK04 |
| Net weight [kg] | 0,17 |

| | |
|------------------------|---------------|
| Colour lamp | white |
| RAL | 9003 |
| EAN-Number | 9010870528048 |
| Energy efficiency cl. | F |
| No. of luminaires B16A | 56 |

LIGHT DISTRIBUTION CURVE

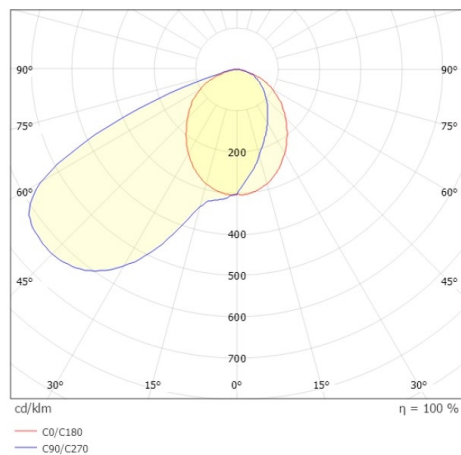

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.