



WEVER & DUCRÉ
LIGHTING

CENTRAL 2.0

313674B3

GENERAL

Wall
Surface
Jet Black
IP20
Interior
Indirect 585 lm
Direct 625 lm
Total 1210 lm
9005^a

LED

2700 K
CRI 90
L90 / 50000 h
3-step binning

OPTICAL

Wide Flood

PHYSICAL



Length 98 mm
Width 55 mm
Height 98 mm
0.5 kg

ELECTRICAL


phase-cut dim
220 - 240 V
Total connected power 13 W
PC1
0.3 m

^a RAL Palette colors may deviate slightly due to production conditions.

Project
Type
Notes
Quantity
Date

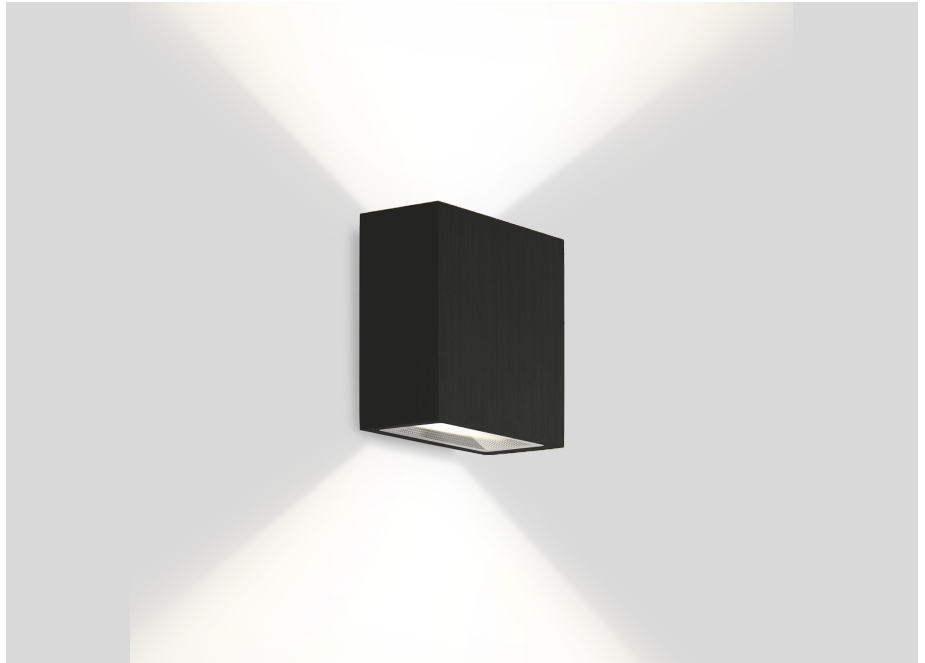

LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

CENTRAL 2.0

313674B3

Project

Type

Notes

Quantity

Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.98	0.98	0.97	0.97
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.