



WEVER & DUCRÉ
LIGHTING

INCH 2.6

312264B4

GENERAL

Wall

Surface

Jet Black

IP20

Interior

480 lm

9005^a

LED

3000 K

3-step binning

PHYSICAL

Length 60 mm

Width 70 mm

Height 260 mm

0.4 kg

ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 8 W

PC1

0.3 m

^a RAL Palette colors may deviate slightly due to production conditions.



Project

Type

Notes

Quantity

Date

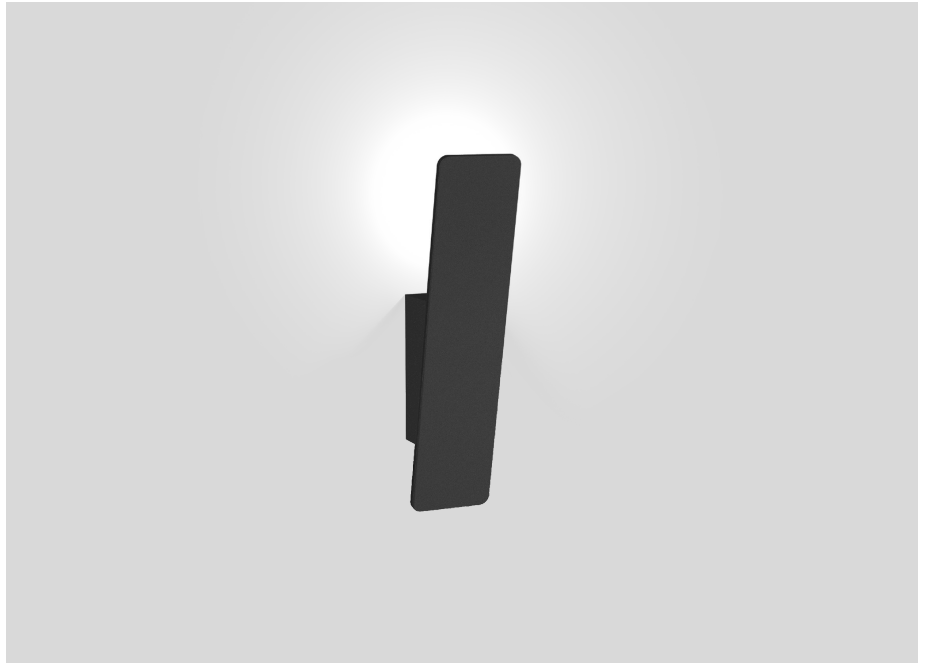



WEVER & DUCRÉ
LIGHTING

INCH
2.6

312264B4

Project

Type

Notes

Quantity

Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.93	0.88	0.82	0.78	0.73
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.