

LUCID LED



Installation

For single or continuous installation using wire self-locking suspension.
Can also be surface mounted (see accessories)

Connection

The single luminaire is equipped with 1,5m connection cable 3x0,75mm². The continuous unit is equipped with through-wiring cable (3x1,5mm²) and a terminal block at each end.
Luminaires for dimming are delivered with 5-core cable.

Material

Aluminum eloxed base and opal PMMA diffuser all around the fitting for light distribution not only downwards, but also to the sideways.

Diffuser

Opal PMMA material for better light dispersion.

Light distribution

Direct and sidewalls symmetrical

Emergency lighting

There is a unit with integrated emergency unit

Dimming

Most models can be equipped with ballast for dimming

Accessories


Single fixtures are equipped by self-locking chrome suspensions, end caps and ceiling box incl. transparent power cable.
The continuous units are equipped by self-locking chrome suspension.

ARCHILIGHT


LUCID LED

technical data

Luminaire dimensions (mm)



L (mm)

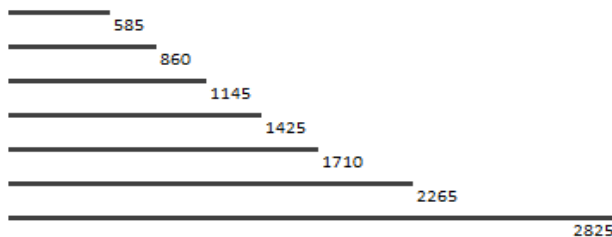

Lucid LED surface mounted				Lucid LED pendant			
W	Lm	L mm	Code	W	Lm	L mm	Code
9	1400	585	SLC130LED/solo/4K	9	1400	585	SLC130LED/solo/4K
9	1332	585	SLC130LED/solo/3K	9	1332	585	SLC130LED/solo/3K
15	2380	585	SLC250LED/solo/4K	15	2380	585	SLC250LED/solo/4K
15	2266	585	SLC250LED/solo/3K	15	2266	585	SLC250LED/solo/3K
14	2100	860	SLC195LED/solo/4K	14	2100	860	SLC195LED/solo/4K
14	1998	860	SLC195LED/solo/3K	14	1998	860	SLC195LED/solo/3K
23	3570	860	SLC375LED/solo/4K	23	3570	860	SLC375LED/solo/4K
23	3399	860	SLC375ED/solo/3K	23	3399	860	SLC375LED/solo/3K
18	2800	1145	SLC260LED/solo/4K	18	2800	1145	SLC260LED/solo/4K
18	2664	1145	SLC260LED/solo/3K	18	2664	1145	SLC260LED/solo/3K
30	4760	1145	SLC500LED/solo/4K	30	4760	1145	SLC500LED/solo/4K
30	4532	1145	SLC500LED/solo/3K	30	4532	1145	SLC500LED/solo/3K
23	3500	1425	SLC325LED/solo/4K	23	3500	1425	SLC325LED/solo/4K
23	3330	1425	SLC325LED/solo/3K	23	3330	1425	SLC325LED/solo/3K
38	5950	1425	SLC625LED/solo/4K	38	5950	1425	SLC625LED/solo/4K
38	5665	1425	SLC625LED/solo/3K	38	5665	1425	SLC625LED/solo/3K
28	4200	1710	SLC2x195LED/solo/4K	28	4200	1710	SLC2x195LED/solo/4K
28	3996	1710	SLC2x195LED/solo/3K	28	3996	1710	SLC2x195LED/solo/3K
46	7140	1710	SLC2x375LED/solo/4K	46	7140	1710	SLC2x375LED/solo/4K
46	6798	1710	SLC2x375ED/solo/3K	46	6798	1710	SLC2x375ED/solo/3K
36	5600	2265	SLC2x260LED/solo/4K	36	5600	2265	SLC2x260LED/solo/4K
36	5328	2265	SLC22x60LED/solo/3K	36	5328	2265	SLC22x60LED/solo/3K
60	9520	2265	SLC52x00LED/solo/4K	60	9520	2265	SLC52x00LED/solo/4K
60	9064	2265	SLC2x500LED/solo/3K	60	9064	2265	SLC2x500LED/solo/3K
46	7000	2825	SLC2x325LED/solo/4K	46	7000	2825	SLC2x325LED/solo/4K
46	6660	2825	SLC2x325LED/solo/3K	46	6660	2825	SLC2x325LED/solo/3K
76	11900	2825	SLC2x625LED/solo/4K	76	11900	2825	SLC2x625LED/solo/4K
76	11330	2825	SLC2x625LED/solo/3K	76	11330	2825	SLC2x625LED/solo/3K