



WEVER & DUCRÉ
LIGHTING

ROB 2.6

701284W3

GENERAL

Ceiling

Surface

Signal White

IP44

Interior

1400 lm

9003^a

LED

2700 K

CRI 90

L80 / 50000 h

3-step binning

PHYSICAL

Diameter 260 mm

Height 60 mm

1.2 kg

ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 21 W

67 lm/W

PC1

0.3 m

^a RAL Palette colors may deviate slightly due to production conditions.


Project

Type


Notes

Quantity


Date

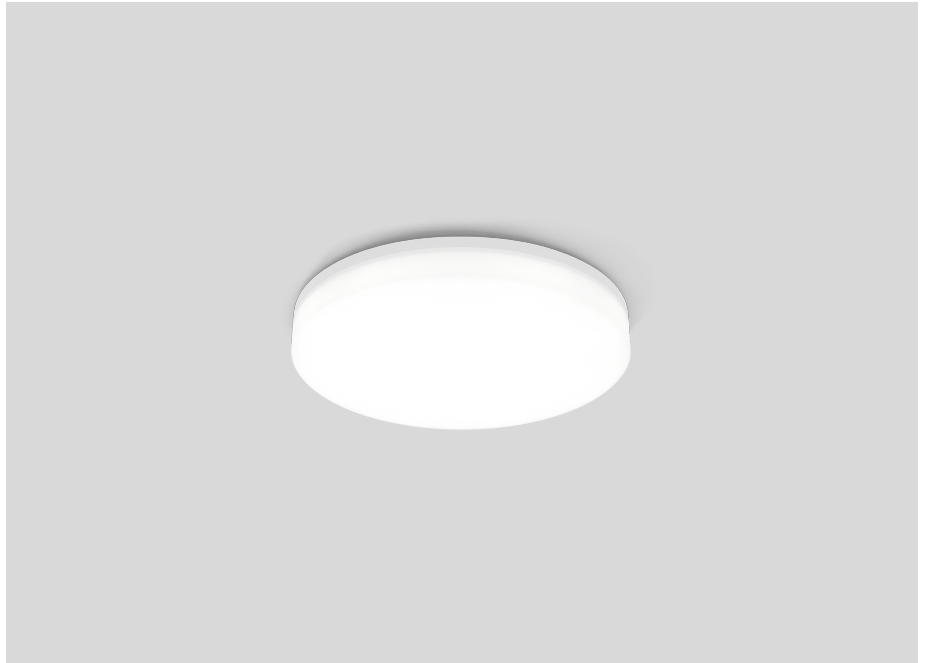

IP44  



LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

ROB 2.6

701284W3

Project _____

Type _____

Notes _____

Quantity _____

Date _____

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.93	0.91	0.89
LSF	1	1	1	1	1

MF LMF × RSMF × LLMF × LSF RSMF^a Room Surface Maintenance Factor
 MF Maintenance Factor LLMF Lamp Lumens Maintenance Factor
 LMF^a Luminaire Maintenance Factor LSF Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Electrical

DIMMER

TYPE	COLOUR	L · W · H (MM)	ORDERCODE
DIMMER FOR SWITCH	Signal Black	18-48-46	9 0 0 1 9 0 1 7
DIMMER DIN RAIL	Pure White	55-17-90	9 0 0 1 9 0 1 8