



WEVER & DUCRÉ  
LIGHTING

# ROB 3.5

701384W3

## GENERAL

Ceiling

Surface

Signal White

IP44

Interior

2250 lm

9003<sup>a</sup>

## LED

2700 K

CRI 90

L80 / 50000 h

3-step binning

## PHYSICAL

Diameter 350 mm

Height 60 mm

1.9 kg

## ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 36 W

63 lm/W

PC1

0.3 m

<sup>a</sup> RAL Palette colors may deviate slightly due to production conditions.


Project

Type


Notes

Quantity


Date

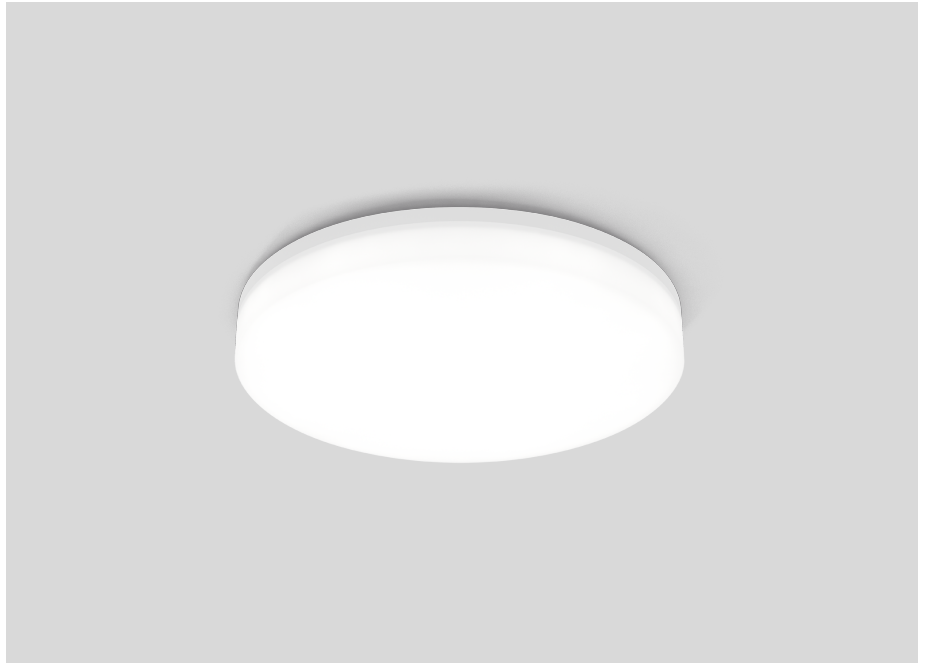

IP44  



## LIGHT DISTRIBUTION





WEVER & DUCRÉ  
LIGHTING

# ROB 3.5

701384W3

Project .....

Type .....

Notes .....

Quantity .....

Date .....

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.93	0.91	0.89
LSF	1	1	1	1	1

MF LMF × RSMF × LLMF × LSF RSMF<sup>a</sup> Room Surface Maintenance Factor  
 MF Maintenance Factor LLMF Lamp Lumens Maintenance Factor  
 LMF<sup>a</sup> Luminaire Maintenance Factor LSF Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Electrical

### DIMMER

TYPE	COLOUR	L · W · H (MM)	ORDERCODE
DIMMER FOR SWITCH	Signal Black	18-48-46	9 0 0 1 9 0 1 7
DIMMER DIN RAIL	Pure White	55-17-90	9 0 0 1 9 0 1 8