

CEILING LED LUMINAIRE

POWER SUPPLY: 230 V AC / 50 - 60 Hz

LIGHT SOURCE: LED

POWER: 32 W

LUMINOUS FLUX: 2990 Lm

BEAM ANGLE: 120°

DIMMING: Non Dimm / DALI Dimm

PROTECTION: IP20

DIMENSIONS: 1100 x 82 x 110 mm

AMBIENT TEMPERATURE: -15 to +40°C

COLOUR TEMPERATURE: 3000 / 4000 K

MATERIAL: aluminium, wood, steel, PMMA

APPLICATION: interior



TRILUM


TRILUM - Sladovnicka 28 - 971 01 Trnava - Slovakia
www.trilum.eu - trilum@trilum.eu - 00421 948 708 008

DATA SHEET


woodLED LINUS 1100



LIGHT DISTRIBUTION



DIMENSIONS

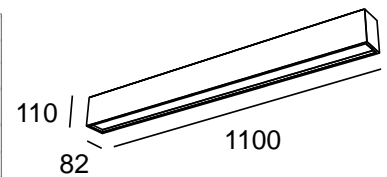

OPTIONAL VENEERING



ORDER CODES

- woodLED LINUS 1100, 3000K, DALI - maple - 031-M20083S-DA
- woodLED LINUS 1100, 3000K, DALI - oak - 031-D20083S-DA
- woodLED LINUS 1100, 3000K, DALI - cherry - 031-C20083S-DA
- woodLED LINUS 1100, 3000K, DALI - walnut - 031-W20083S-DA
- woodLED LINUS 1100, 3000K, DALI - palisander- 031-P20083S-DA
- woodLED LINUS 1100, 4000K, DALI - maple - 031-M20084S-DA
- woodLED LINUS 1100, 4000K, DALI - oak - 031-D20084S-DA
- woodLED LINUS 1100, 4000K, DALI - cherry - 031-C20084S-DA
- woodLED LINUS 1100, 4000K, DALI - walnut - 031-W20084S-DA
- woodLED LINUS 1100, 4000K, DALI - palisander- 031-P20084S-DA
- woodLED LINUS 1100, 3000K, Non Dim - maple - 031-M20083S-00
- woodLED LINUS 1100, 3000K, Non Dim - oak - 031-D20083S-00
- woodLED LINUS 1100, 3000K, Non Dim - cherry - 031-C20083S-00
- woodLED LINUS 1100, 3000K, Non Dim - walnut - 031-W20083S-00
- woodLED LINUS 1100, 3000K, Non Dim - palisander- 031-P20083S-00
- woodLED LINUS 1100, 4000K, Non Dim - maple - 031-M20084S-00
- woodLED LINUS 1100, 4000K, Non Dim - oak - 031-D20084S-00
- woodLED LINUS 1100, 4000K, Non Dim - cherry - 031-C20084S-00
- woodLED LINUS 1100, 4000K, Non Dim -walnut - 031-W20084S-00
- woodLED LINUS 1100, 4000K, Non Dim - palisander- 031-P20084S-00