

CEILING LED LUMINAIRE

POWER SUPPLY: 230 V AC/ 50 - 60 Hz

LIGHT SOURCE: LED

POWER: 48 W

LUMINOUS FLUX: 4480 Lm

BEAM ANGLE: 120°

DIMMING: Non Dimm / DALI Dimm

CRI: 90

PROTECTION: IP20

DIMENSIONS: 1600 x 82 x 110 mm

AMBIENT TEMPERATURE: -15 to +40°C

COLOUR TEMPERATURE: 3000 / 4000 K

MATERIAL: aluminium, wood, steel, PMMA

APPLICATION: interior



TRILUM


TRILUM - Sladovnicka 28 - 971 01 Trnava - Slovakia
www.trilum.eu - trilum@trilum.eu - 00421 948 708 008

DATA SHEET


woodLED LINUS 1600



LIGHT DISTRIBUTION



DIMENSIONS

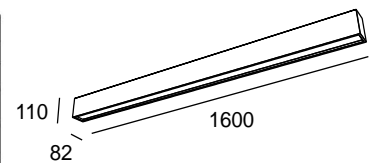

OPTIONAL VENEERING



ORDER CODES

- woodLED LINUS 1600, 3000K, DALI - maple - 032-M20083S-DA
- woodLED LINUS 1600, 3000K, DALI - oak - 032-D20083S-DA
- woodLED LINUS 1600, 3000K, DALI - cherry - 032-C20083S-DA
- woodLED LINUS 1600, 3000K, DALI - walnut - 032-W20083S-DA
- woodLED LINUS 1600, 3000K, DALI - palisander - 032-P20083S-DA
- woodLED LINUS 1600, 4000K, DALI - maple - 032-M20084S-DA
- woodLED LINUS 1600, 4000K, DALI - oak - 032-D20084S-DA
- woodLED LINUS 1600, 4000K, DALI - cherry - 032-C20084S-DA
- woodLED LINUS 1600, 4000K, DALI - walnut - 032-W20084S-DA
- woodLED LINUS 1600, 4000K, DALI - palisander - 032-P20084S-DA
- woodLED LINUS 1600, 3000K, Non Dimm - maple - 032-M20083S-00
- woodLED LINUS 1600, 3000K, Non Dimm - oak - 032-D20083S-00
- woodLED LINUS 1600, 3000K, Non Dimm - cherry - 032-C20083S-00
- woodLED LINUS 1600, 3000K, Non Dimm - walnut - 032-W20083S-00
- woodLED LINUS 1600, 3000K, Non Dimm - palisander - 032-P20083S-00
- woodLED LINUS 1600, 4000K, Non Dimm - maple - 032-M20084S-00
- woodLED LINUS 1600, 4000K, Non Dimm - oak - 032-D20084S-00
- woodLED LINUS 1600, 4000K, Non Dimm - cherry - 032-C20084S-00
- woodLED LINUS 1600, 4000K, Non Dimm - walnut - 032-W20084S-00
- woodLED LINUS 1600, 4000K, Non Dimm - palisander - 032-P20084S-00