

# CEILING LED LUMINAIRE

POWER SUPPLY: 230 V AC / 50 - 60 Hz

LIGHT SOURCE: Samsung 2835 LED

POWER: 55 W

LUMINOUS FLUX: 4860 lm / 4000 K

BEAM ANGLE: 120°

DIMMING: PUSH DIMM / DALI

CRI: 90

PROTECTION: IP20

DIMENSIONS: 590 x 590 x 104 mm

AMBIENT TEMPERATURE: -15 to +40°C

COLOUR TEMPERATURE: 3000 / 4000 K

WEIGHT: 7 kg

MATERIAL: aluminium, wood, steel, PMMA

APPLICATION: interior



## TRILUM


TRILUM - Sladovnička 28 - 971 01 Tmava - Slovakia  
www.trilum.eu - trilum@trilum.eu - 00421 948 708 008

# DATA SHEET


woodLED SLOPE 600



LIGHT DISTRIBUTION



DIMENSIONS

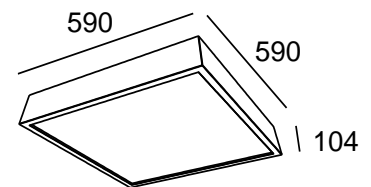

OPTIONAL VENEERING



ORDER CODES

woodLED SQUARE 600, 3000K, DALI - maple - 007-MM0083S-DA

woodLED SQUARE 600, 3000K, DALI - oak - 007-DD0083S-DA

woodLED SQUARE 600, 3000K, DALI - cherry - 007-CC0083S-DA

woodLED SQUARE 600, 3000K, DALI - walnut - 007-WW0083S-DA

woodLED SQUARE 600, 3000K, DALI - palisander - 007-PP0083S-DA

woodLED SQUARE 600, 4000K, DALI - maple - 007-MM0084S-DA

woodLED SQUARE 600, 4000K, DALI - oak - 007-DD0084S-DA

woodLED SQUARE 600, 4000K, DALI - cherry - 007-CC0084S-DA

woodLED SQUARE 600, 4000K, DALI - walnut - 007-WW0084S-DA

woodLED SQUARE 600, 4000K, DALI - palisander - 007-PP0084S-DA