

# CEILING LED LUMINAIRE

POWER SUPPLY: 230 V AC / 50 - 60 Hz

LIGHT SOURCE: Samsung 2835 LED

POWER: 155 W

LUMINOUS FLUX: 15300 lm / 4000 K

BEAM ANGLE: 120°

DIMMING: PUSH DIMM / DALI

CRI: 90

PROTECTION: IP20

DIMENSIONS: 1110 x 1110 x 104 mm

AMBIENT TEMPERATURE: -15 to +40°C

COLOUR TEMPERATURE: 3000 / 4000 K

WEIGHT: 23 kg

MATERIAL: aluminium, wood, steel, PMMA

APPLICATION: interior



## TRILUM


TRILUM - Sladovnicka 28 - 971 01 Trnava - Slovakia  
www.trilum.eu - trilum@trilum.eu - 00421 948 708 008

# DATA SHEET


woodLED SQUARE 1200



LIGHT DISTRIBUTION



DIMENSIONS

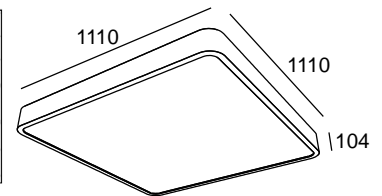

OPTIONAL VENEERING



ORDER CODES

woodLED SQUARE 1200, 3000K, DALI - maple - 003-MM0083S-DA  
woodLED SQUARE 1200, 3000K, DALI - oak - 003-DD0083S-DA  
woodLED SQUARE 1200, 3000K, DALI - cherry - 003-CC0083S-DA  
woodLED SQUARE 1200, 3000K, DALI - walnut - 003-WW0083S-DA  
woodLED SQUARE 1200, 3000K, DALI - palisander - 003-PP0083S-DA  
woodLED SQUARE 1200, 4000K, DALI - maple - 003-MM0084S-DA  
woodLED SQUARE 1200, 4000K, DALI - oak - 003-DD0084S-DA  
woodLED SQUARE 1200, 4000K, DALI - cherry - 003-CC0084S-DA  
woodLED SQUARE 1200, 4000K, DALI - walnut - 003-WW0084S-DA  
woodLED SQUARE 1200, 4000K, DALI - palisander - 003-PP0084S-DA