



reddot winner 2020

## JANE

semi-recessed / surface / suspended


**EN** Highly flexible light rope made of food grade silicone for creative and decorative design; extremely slim design (only 18 mm diameter); for wall-/ceiling surface mounting or suspended mounting (cable suspension, height adjustment without tools); completely homogeneously illuminated, matt surface; 360° light emission; energy-efficient LEDs with very good colour rendering; optionally with external converter for ceiling installation or suspended in combination with the light rope (available as an accessory)

**DE** Hochflexibles Lichtseil aus lebensmittelechtem Silikon zur kreativen, dekorativen Gestaltung; extrem schlanke Bauform (nur 18 mm Durchmesser); für Wand-/Decken-anbaumontage oder für abgehängte Montage (Seilabhängung, werkzeuglose Höhenverstellung); absolut homogen ausgeleuchtete, matte Oberfläche; 360° Lichtabstrahlung; energieeffiziente LEDs mit sehr guter Farbwiedergabe; wahlweise externer Konverter für Deckeneinwurf oder abgependelt in Kombination mit dem Lichtseil (als Zubehör erhältlich)

### Quickinfo

3000K, 4000K  
CRI ≥ 90, 3 SDCM  
up to 1000lm/m  
up to 71lm/W  
L80 @ 50000h  
non DIM, DALI  
IP 40

### Types

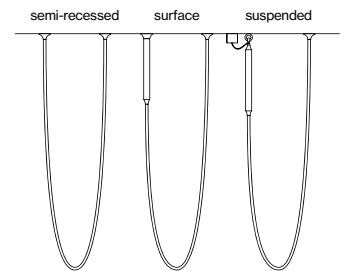

ø18 x 1000-10 000


### Canopy colours



### Light distribution




360°



many mounting options



dust and insect protection (IP40)



360° light emitting


### Order options

<b>COLOUR TEMPERATURE</b>	☐☐
3000K	5
4000K	6


<b>CONTROL</b>	⬆️⬆️
non DIM	1
DALI	3

<b>LENGTH</b>	L
1000 mm	1
2000 mm	2
3000 mm	3
4000 mm	4
6000 mm	6
8000 mm	8
10000 mm	0

<b>MATERIAL COLOUR</b>	☑️
○ pure white RAL 9010	7
● jet black RAL 9005	8



### JANE semi-recessed / surface / suspended





#### LUMINAIRE

<b>SYSTEM POWER</b>	<b>COLOUR TEMP.</b>	<b>LUMINOUS FLUX</b>	<b>ORDER CODE</b>
14.4W/m	3000K 4000K	812lm/m 1000lm/m	0 5 8 - 6 5 1 L :: 1 0

### Mounting accessories

#### MOUNTING ACCESSORIES

TYPE	L-W-H (mm)	ORDER CODE
1 mounting set recessed	ø 74-100	0 5 8 - 6 5 9 0 2 1 ☑️
2 mounting set surface	ø 74-39	0 5 8 - 6 5 9 1 0 1 ☑️
3 mounting set suspended	ø 50/30-135	0 5 8 - 6 5 9 2 0 1 ☑️
4 clip surface (transparent)	15-21-24	0 5 8 - 6 5 9 1 4 1 0
5 channel surface (transparent)	1000-21-24	0 5 8 - 6 5 9 1 1 1 0
6 mounting ring surface	ø 39-9-61	0 5 8 - 6 5 9 1 6 1 ☑️
7 mounting ring suspended	ø 39-9	0 5 8 - 6 5 9 2 6 1 ☑️

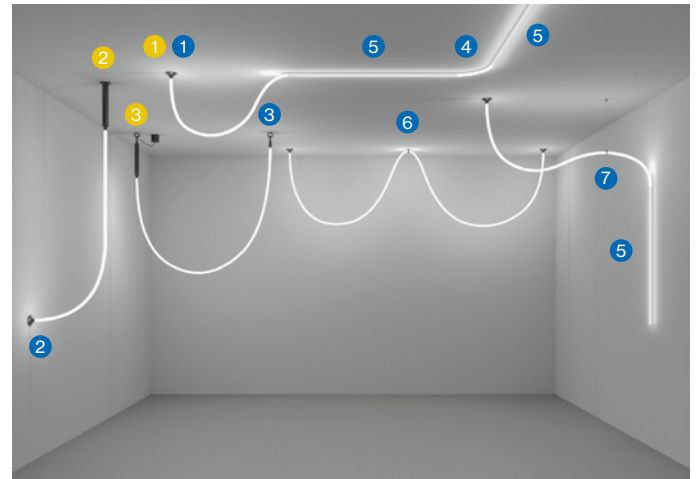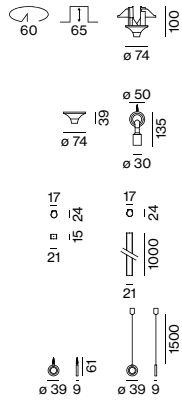


various mounting options with different mounting accessories

### Electrical accessories



<b>1 POWER SUPPLY RECESSED 220-240 V AC, 48V, 50-60Hz</b>		
<b>TYPE</b>	<b>L-W-H (mm)</b>	<b>ORDER CODE</b>
100 W recessed <input type="checkbox"/> PC II	350-30-18	0 0 2 - 6 2 1 3 4
150 W recessed <input type="checkbox"/> PC II	350-30-18	0 0 2 - 6 2 1 3 5
60 W revision opening <input type="checkbox"/> PC II	163-43-32	0 0 2 - 6 2 1 3 3
100 W revision opening <input type="checkbox"/> PC II	350-30-18	0 0 2 - 6 2 1 3 4
150 W revision opening <input type="checkbox"/> PC II	350-30-18	0 0 2 - 6 2 1 3 5
250 W revision opening <input type="checkbox"/> PC II	400-40-22	0 0 2 - 6 2 1 3 9
320 W revision opening <input type="checkbox"/> PC I	252-90-44	0 0 2 - 6 0 3 2 0
DALI device	120-30-22	0 5 8 - 6 5 9 9 3 3 0



<b>2 POWER SUPPLY SURFACE 220-240 V AC, 48V, 50-60Hz</b>		
<b>TYPE</b>	<b>L-ø (mm)</b>	<b>ORDER CODE</b>
100 W surface <input type="checkbox"/> PC II	584-ø40	0 5 8 - 6 5 9 1 2 ☑️☑️
150 W surface <input type="checkbox"/> PC II	584-ø40	0 5 8 - 6 5 9 1 3 ☑️☑️
<b>3 POWER SUPPLY SUSPENDED 220-240 V AC, 48V, 50-60Hz</b>		
<b>TYPE</b>	<b>L-ø (mm)</b>	<b>ORDER CODE</b>
100 W suspended <input type="checkbox"/> PC II	639-ø40	0 5 8 - 6 5 9 2 2 ☑️☑️
150 W suspended <input type="checkbox"/> PC II	639-ø40	0 5 8 - 6 5 9 2 3 ☑️☑️

incl. ceiling canopy and 2000mm power cable

LUMINOUS FLUX value calculated for CRI ≥ 90, colour white, rope silicone