



WEVER & DUCRÉ  
LIGHTING

# LUNA SQUARE IP44 1.0

114981W5

Project

Type

Notes

Quantity

Date

## GENERAL

Ceiling, Recessed

White Matt

RAL 9010<sup>a</sup>

Front IP44

Back IP20

Interior

Output: 610 lm

## LED

3000 K

3 SDCM

## OPTICAL

Opal,

## ELECTRICAL

excl. driver

18 V

LED Inset 6.0 W

Class 3

## PHYSICAL

Length 90 mm

Width 90 mm

Height 37 mm

0.13 kg

blade springs

## CUTOUT




Length 73 mm

Width 73 mm

Min. ceiling thickness 12 mm

Recessed depth 50 mm

<sup>a</sup> Color may deviate slightly due to production conditions.

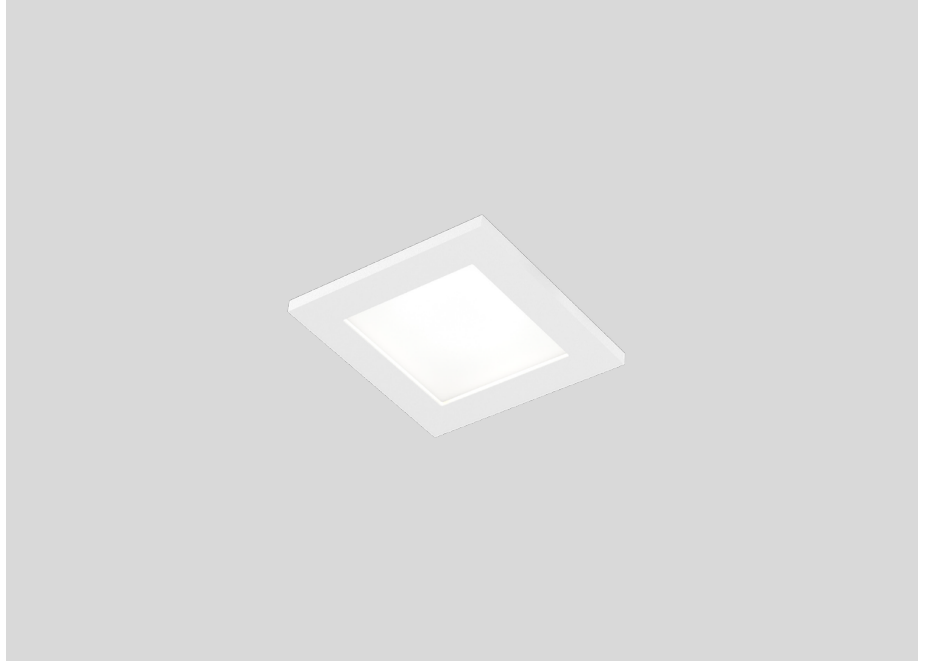



WEVER & DUCRÉ  
LIGHTING

# LUNA SQUARE IP44 1.0

114981W5

## ELECTRICAL

### Driver

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
6W   350mA	67·39·22	8.6-18V	9 0 2 1 3 3 0 3
10W   350mA   1-10V dim	101.5·51·29.5	14-28V	9 0 2 2 3 4 0 1
10W   350mA   phase-cut dim	102·38·21	12-28V	9 0 2 2 3 4 0 2
10W   350mA	115·41·25	13-26V	9 0 2 2 3 4 0 6
14W   350mA	145·33·21	2.5-42V	9 0 2 4 3 5 0 1
17W   350mA   10-49V   DALI	108·52·22	10-49V	9 0 2 4 3 6 0 1