



WEVER & DUCRÉ
LIGHTING

SIRRO 3.0 PAR16

139320W0

Project
Type
Notes
Quantity
Date

GENERAL

Ceiling
 Surface
 Signal White
 IP20
 Interior
 1350^a to 1370^b lm
 RAL 9003^c

LED

Lamp 3 x PAR16
 PAR16
 Socket GU10
 max. 12 W
 CRI ≥ 80

OPTICAL

Beam angle 48°



PHYSICAL

Length 340 mm
 Width 120 mm
 Height 130 mm
 1.51 kg
 Tilt min 35°
 Tilt max 35°
 Rotation 355°


ELECTRICAL

100 - 240 V
 Total connected power 19.8^b to 20^a W
 Class 1
 Safety distance 0.3 m


^a LED 3000K CRI 80 white
^b LED 2700K CRI 80 white
^c Color may deviate slightly due to production conditions.

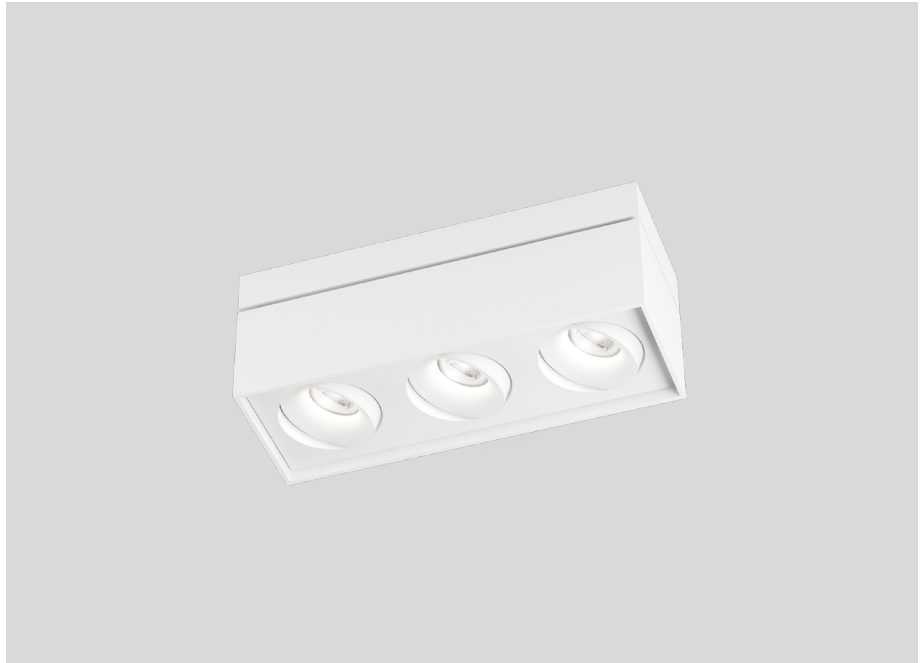

Squared ceiling surface mounted downlight made from die-cast aluminium; surface Signal White; powder coated; matt texture; RAL 9003; lamp socket GU10; lamp type PAR16; 3x max. 12W; 100 - 240 V; degree of protection IP20; PC1; lamp not included;



LIGHT DISTRIBUTION



[139320W0] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.
 © Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com



WEVER & DUCRÉ
LIGHTING

SIRRO 3.0 PAR16

139320W0

CONE DIAGRAM

LED 3000K CRI ≥ 88^{white}

h (m)	EO° (lx)	ø (m)
1	1890	0.89
2	470	1.78
3	210	2.67
4	120	3.56
5	80	4.45

LAMPS

PAR16 LED Lamp

TYPE	COLOUR	Ø · H (MM)	ORDERCODE
2700K >90 CRI GU10	Black	ø50·58	9 0 1 2 2 8 B 3
3000K >90 CRI GU10	Black	ø50·58	9 0 1 2 2 8 B 5
2700K >90 CRI GU10	White	ø50·58	9 0 1 2 2 8 W 3
3000K >90 CRI GU10	White	ø50·58	9 0 1 2 2 8 W 5
2700K >80 CRI GU10	Silver	ø50·52	9 0 5 2 2 7 S 2
3000K >80 CRI GU10	Silver	ø50·52	9 0 5 2 2 7 S 4