

DEEP PETIT FIX

05-Jun-2019

1.0 LED

LED 6W | 350mA | COB 3-step | excl. power supply

CE IP20 0.3m P 34°

white texture	153161W_
silver / grey	153161S_
black texture	153161B_

LIGHT COLOUR


2700K | >90CRI | 580lm 18Vf 3

3000K | >90CRI | 610lm 18Vf 5

1800-2700K | >95CRI | 360lm 15Vf 9

ALWAYS USE

for power supplies see our catalogue

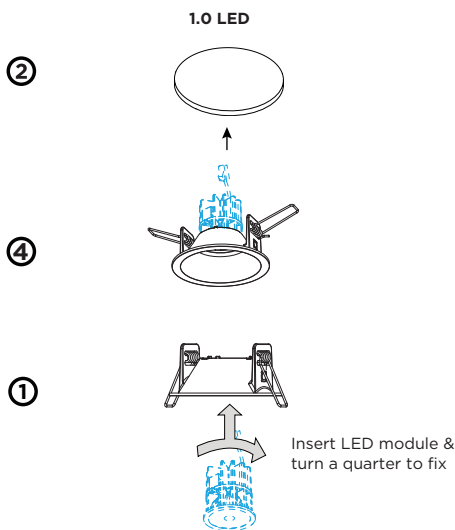

DIMENSIONS



MOUNTING INSTRUCTION

- ① Put the led engine in the assembled cover.
- ② Make a hole in the ceiling according to the prescribed dimensions.
- ③ **POWER CONNECTION**
SERIAL CONNECTION - for LED
Always use POWER SUPPLY according to the specifications of the LED-module

220-240V

fixture 01
- ④ Turn the springs and insert the fixture in the ceiling hole



CAUTION: NO HOT PLUGGING!

Before connecting the luminaire the converter needs to be disconnected from the power supply. If this instruction is disregarded the luminaire might be damaged or destroyed.



WEVER & DUCRÉ
LIGHTING

www.weverducre.com

Wever & Ducre bvba Spinnerijstraat 99/21 8500 Kortrijk

**INSTALLATION
INSTRUCTIONS**