


PERFORA

222-00158


PERFORA PRO XL SUSPENSION made of aluminium, black, similar to RAL 7021, lens optic with anti-glare grid light output direct / indirect 40:60, UGR <19, with converter, dimmability: DALI 2, Push, cable transparent, adapter/ceiling base black, pendant length 4000mm, IP20



DRAWING

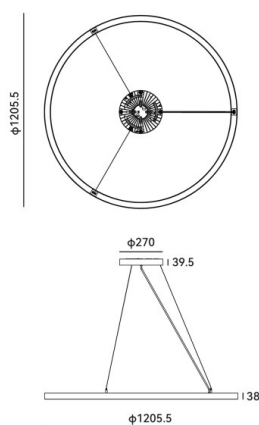

LIGHT DISTRIBUTION CURVE

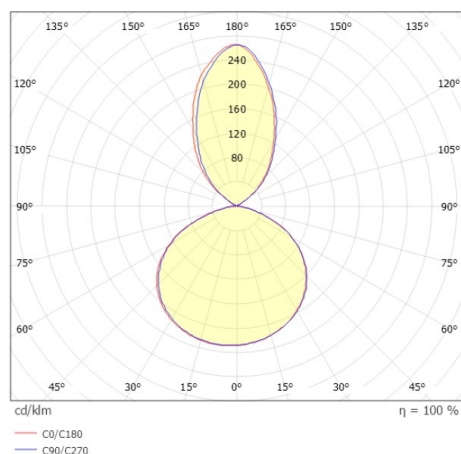

TECHNICAL DETAILS

System perform. [W]	77
Bulb type	LED
Luminous flux [lm]	9830/10090
Colour temp. [K]	2700/3000K
CRI	>90
UGR	<19
Optics	lens optics with glare control louvre
Converter	with converter
Light output	direct / indirect 40:60
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	38
Pendant length [mm]	4000
Diameter [mm]	1205
IP protection class	IP20
Voltage class	protection cl. I
Shock resistance	IK02
Net weight [kg]	8,00
Colour lamp	black
RAL	7021
Colour adapter/ceiling base	black
Electric wire	transparent
EAN-Number	9010870561649
Lifetime [h]	L80 B10 50 000
Ambient temperature	-20° bis +40°
Energy efficiency cl.	D



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.