



WEVER & DUCRÉ
LIGHTING

MILES 2.0 ROUND

317574P3

GENERAL

Wall
Surface
Copper
IP20
Interior
400 lm

LED

2700 K
L80 / 50000 h
3-step binning



PHYSICAL

Length 190 mm
Width 37 mm
0.77 kg

ELECTRICAL

phase-cut dim
220 - 240 V
Total connected power 8 W
PC2
0.3 m

Project
Type
Notes
Quantity
Date

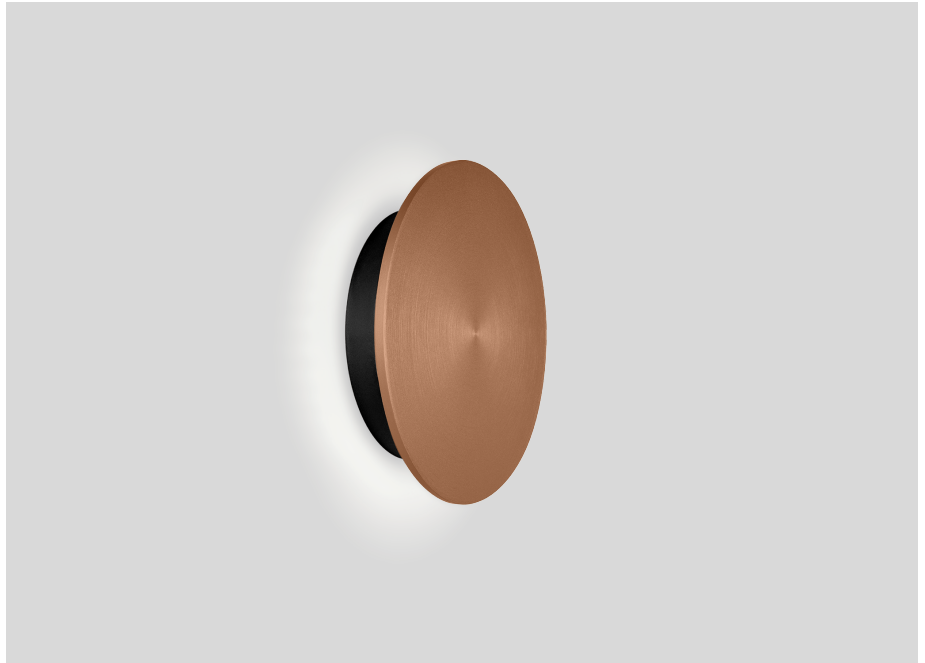



WEVER & DUCRÉ
LIGHTING

MILES 2.0 ROUND

317574P3

Project

Type

Notes

Quantity

Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.96	0.92	0.88	0.84	0.8
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.