



WEVER & DUCRÉ
LIGHTING

TOWNA 3.0

178384J5

GENERAL

Ceiling

Surface

Signal White + Gold

IP44

Interior

1660 lm

9010^a

LED

3000 K

3-step binning

PHYSICAL

Diameter 461 mm

Height 92 mm

3 kg

ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 32 W

52 lm/W

PC1

0.3 m

^a RAL Palette colors may deviate slightly due to production conditions.

Project

Type


Notes

Quantity

Date



IP44  

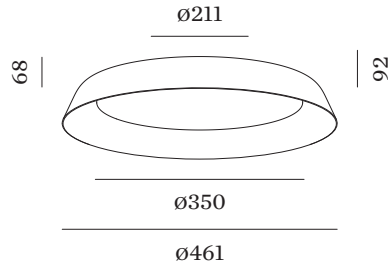



WEVER & DUCRÉ
LIGHTING

TOWNA 3.0

178384J5

Project

Type

Notes

Quantity

Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.93	0.91	0.89
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Electrical

DIMMER

TYPE	COLOUR	L · W · H (MM)	ORDERCODE
DIMMER FOR SWITCH	Signal Black	18-48-46	9 0 0 1 9 0 1 7
DIMMER DIN RAIL	Pure White	55-17-90	9 0 0 1 9 0 1 8