

BO 32 intrack 1 lamp


180-7130438F



Project / Type _____

Notes _____

Count / Date _____

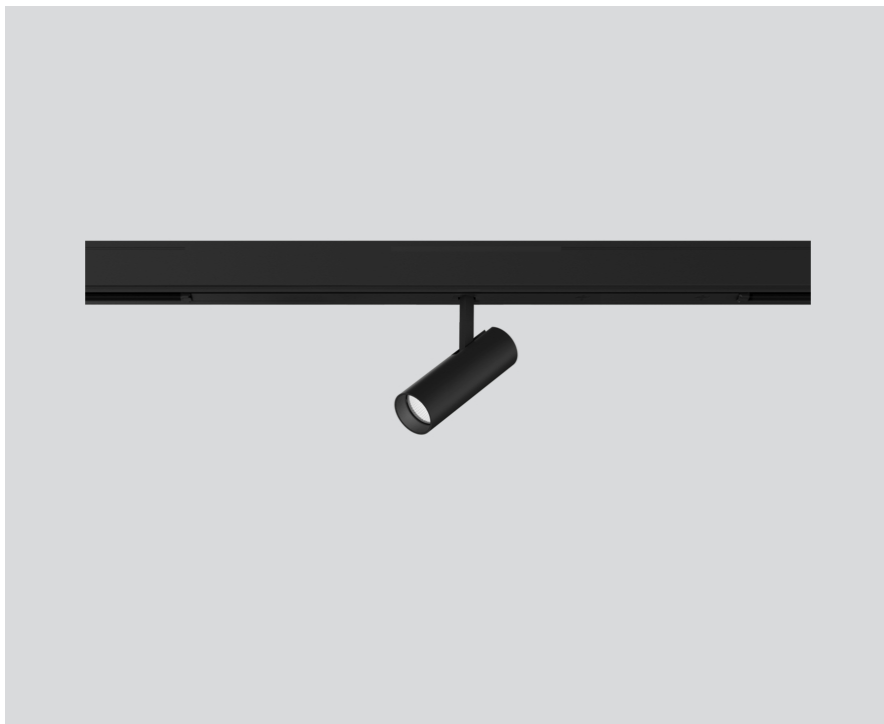

General

Ceiling , Track
tilt max 90°
rotation 360°
black , RAL9005 ¹
IP20
716 lm

LED

2700 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R_g: 99 , R_f: 91 , R₍₁₋₁₅₎: 89
MR 0.53
MDER 0.48

Optical

flood
beam angle 37°

Electrical

DALI-2
10.7 W
PC2 220-240V
67 lm/W
1 DALI Addr.


Physical

diameter 32 mm
height 100 mm

¹ RAL code

Tracked spotlight in die-cast aluminium with 3-phase adapter; classic style in elegant design for discerning requirements; 1 lamp; cylindrical spotlight head; surface black powder coated; spotlight head 360° rotatable and 90° tiltable; converter integrated in the power track adapter; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; high quality, aluminium, vapour deposition coated reflector with faceted lens design; precise radiation characteristic with 37° beam; good glare control through recessed light point level; optical attachment available as accessory; accessories are listed separately; degree of protection IP20; PC2 220-240V; adapter for toolless insertion or movement on a variety of 3-phase power tracks; adapter flush with the power track; incl. DALI-2 converter; flicker-free visual comfort through analogue current control (minimum value 1%); light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Light distribution



flood 37°

h (m)	E0° (lx)	ø (m)
1	1980	0.67
2	490	1.34
3	220	2.01
4	120	2.68
5	80	3.35

Product drawing



Lighting calculator

